

# KE212/6OS4-ATEX1



surface-mounted luminaire • linear

- Application : Harsh environments, ATEX environments
- housing: lacquered aluminium
- light source : LED • 5000 K
- optics : linear lens • polycarbonate (PC)
- Lumen output in emergency mode : 520 lm
- function: escape route lighting
- monitoring: EST+ self-test with remote control
- photobiological safety: EN 62471: RISK GROUP 0 UNLIMITED

## Product information

### Mechanical properties

- dimensions : 423 mm x 80 mm x 135 mm
- colour: RAL7035 - light grey
- IP: IP66, IP69K
- IK: IK07
- ambient temperature: -20°C - 40°C •
- ATEX : II 2D Ex tb IIIC T80°C Db, II 3G Ex ec IIC T4 Gc

### Battery


- mode of operation : adjustable: non-maintained/maintained
- Battery: 4 x NiMh 1,2V 2,1Ah
- autonomy : 60 minutes

### Electrical properties

- power : 2.4 W
- voltage: 220-240V
- frequency : 50-60Hz AC

Luminance



luminous flux : 520 lm

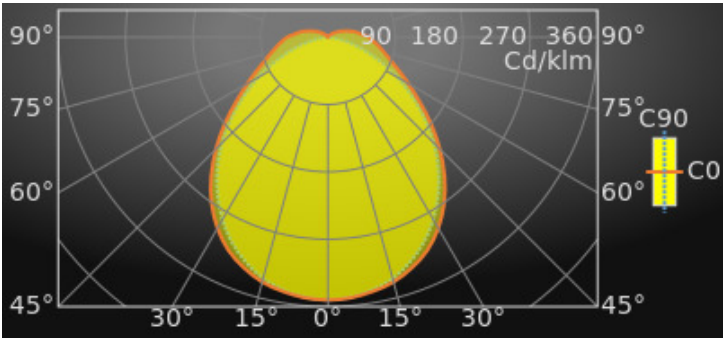

This document has been compiled by ETAP with the greatest possible care. However, the information contained in this publication is not binding and may change due to technical development. ETAP is not liable for any damage whatsoever resulting from the use of this document.

[www.etaplighting.com](http://www.etaplighting.com) // Made in Belgium


Distance tables: ceiling mounted

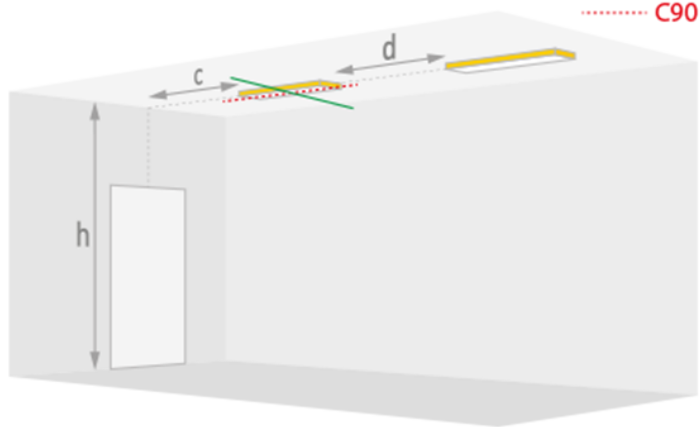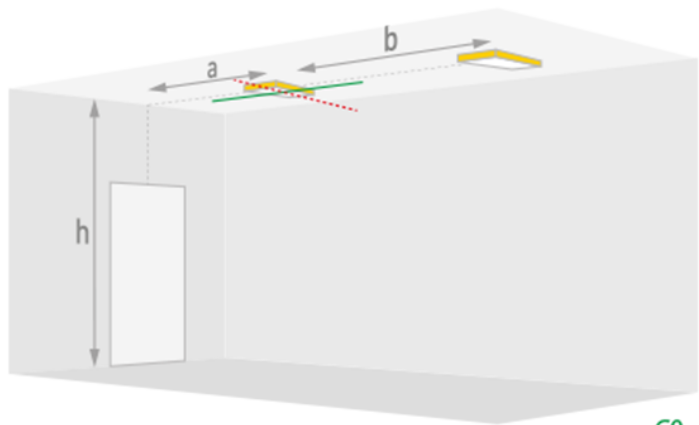

— C0  
..... C90

ER Ceiling for 1.0 Lux and 520 lm

H (m)	a	b	c	d
2.6	4.7	11.8	4.5	10.8
2.8	4.9	12.1	4.6	11.2
3.0	5.0	12.4	4.8	11.6
3.5	5.3	13.2	5.1	12.5
4.0	5.5	13.9	5.4	13.3
4.5	5.7	14.5	5.6	14.0
5.0	5.9	15.0	5.8	14.6
6.0	6.2	16.0	6.0	15.6
7.0	6.3	16.7	6.1	16.4
8.0	6.3	17.3	6.1	16.9
10.0	5.9	17.9	5.6	17.4
12.0	4.6	17.6	4.3	17.0

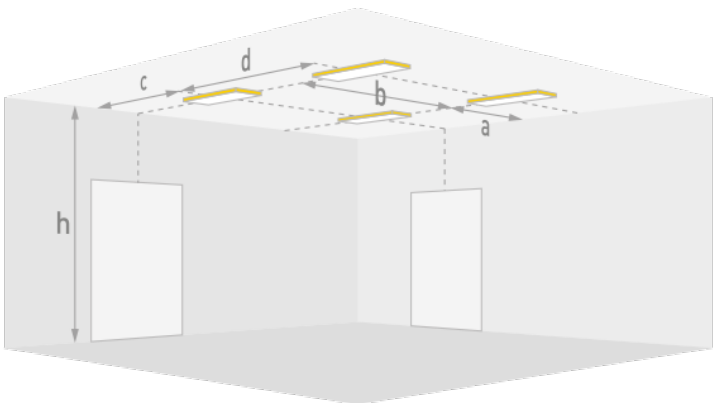


AP Ceiling for 0.5 Lux and 520 lm

H (m)	a	b	c	d
2.6	4.8	14.1	2.3	10.3
2.8	4.7	14.2	2.6	11.0
3.0	4.8	14.5	2.8	11.4
3.5	5.2	15.4	3.0	12.2
4.0	5.4	16.2	3.2	13.0
4.5	5.6	16.8	3.5	13.9
5.0	5.8	17.5	3.6	14.6
6.0	6.3	19.0	3.7	15.6
7.0	6.3	19.7	4.3	17.2
8.0	6.3	20.4	4.8	18.6
10.0	6.8	22.6	4.4	19.8
12.0	6.9	24.2	4.0	21.1

AP Ceiling for 1.0 Lux and 520 lm

<b>H (m)</b>	<b>a</b>	<b>b</b>	<b>c</b>	<b>d</b>
2.6	3.9	11.3	1.9	8.6
2.8	3.8	11.3	2.3	9.2
3.0	3.8	11.5	2.5	9.6
3.5	4.2	12.5	2.4	10.0
4.0	4.4	13.1	2.6	10.7
4.5	4.4	13.5	2.9	11.6
5.0	4.7	14.2	2.8	11.9
6.0	4.9	15.2	2.9	12.9
7.0	5.0	16.1	2.9	13.7
8.0	4.9	16.7	3.0	14.6
10.0	4.2	17.6	2.8	16.1
12.0	3.5	18.4	1.8	16.6

Distance tables: wall mounted

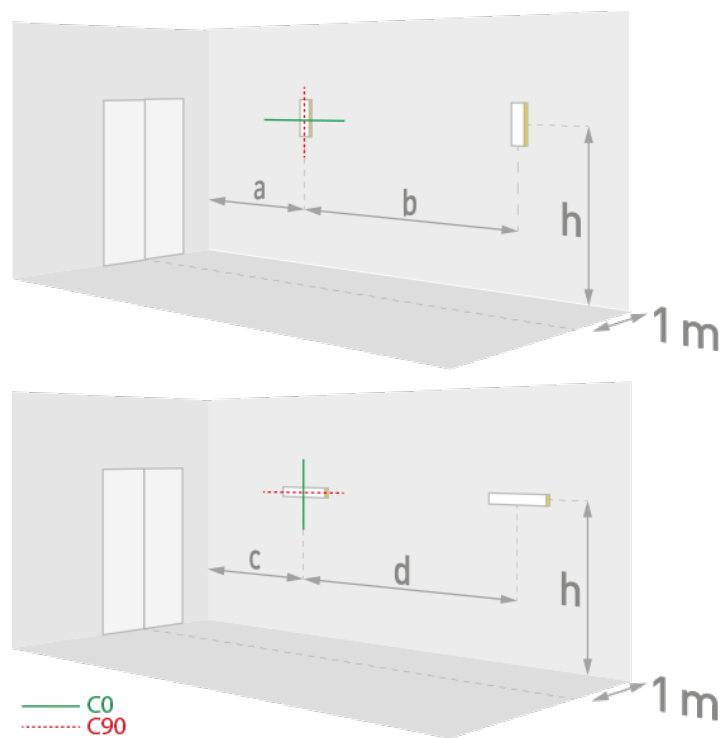

"

ER Wall for 1.0 Lux and 520 lm

H (m)	a	b	c	d
1.4	3.3	8.6	2.9	7.1
1.6	3.4	8.8	3.0	7.3
1.8	3.4	9.0	3.0	7.5
2.0	3.4	9.2	3.1	7.7
2.2	3.4	9.3	3.1	7.8
2.4	3.4	9.3	3.1	8.0
2.6	3.3	9.4	3.1	8.1
2.8	3.3	9.4	3.1	8.1
3.0	3.2	9.3	3.0	8.2
3.5	2.8	8.6	2.9	8.3
4.0	---	---	2.8	8.2
4.5	---	---	2.5	8.1
5.0	---	---	2.1	7.8
6.0	---	---	0.8	7.0
7.0	---	---	---	4.4
8.0	---	---	0.1	0.6


AP Wall for 0.5 Lux and 520 lm

H (m)	a	b	c	d
1.4	4.1	10.6	3.1	7.4
1.6	4.2	11.0	3.2	7.7
1.8	4.3	11.3	3.3	8.1
2.0	4.4	11.6	3.4	8.3
2.2	4.4	11.8	3.5	8.6
2.4	4.4	11.9	3.5	8.9
2.6	4.4	12.1	3.6	9.1
2.8	4.4	12.2	3.6	9.3
3.0	4.4	12.2	3.7	9.5
3.5	---	8.8	3.8	9.8
4.0	---	---	3.8	10.1
4.5	---	---	3.7	10.3
5.0	---	---	3.6	10.4
6.0	---	---	3.2	10.4
7.0	---	---	2.5	10.0
8.0	---	---	1.2	9.2
10.0	---	---	---	4.4

AP Wall for 1.0 Lux and 520 lm

H (m)	a	b	c	d
1.4	3.2	8.3	2.5	6.2
1.6	3.2	8.5	2.6	6.4
1.8	3.2	8.6	2.6	6.6
2.0	3.2	8.7	2.7	6.8
2.2	3.2	8.8	2.7	7.0
2.4	3.1	8.8	2.7	7.1
2.6	3.0	8.8	2.8	7.2
2.8	2.8	8.7	2.7	7.3
3.0	---	5.9	2.7	7.4
3.5	---	---	2.6	7.5
4.0	---	---	2.5	7.5
4.5	---	---	2.2	7.4
5.0	---	---	1.8	7.2
6.0	---	---	0.3	6.3
7.0	---	---	---	3.5

Isolux diagram - wall mounting

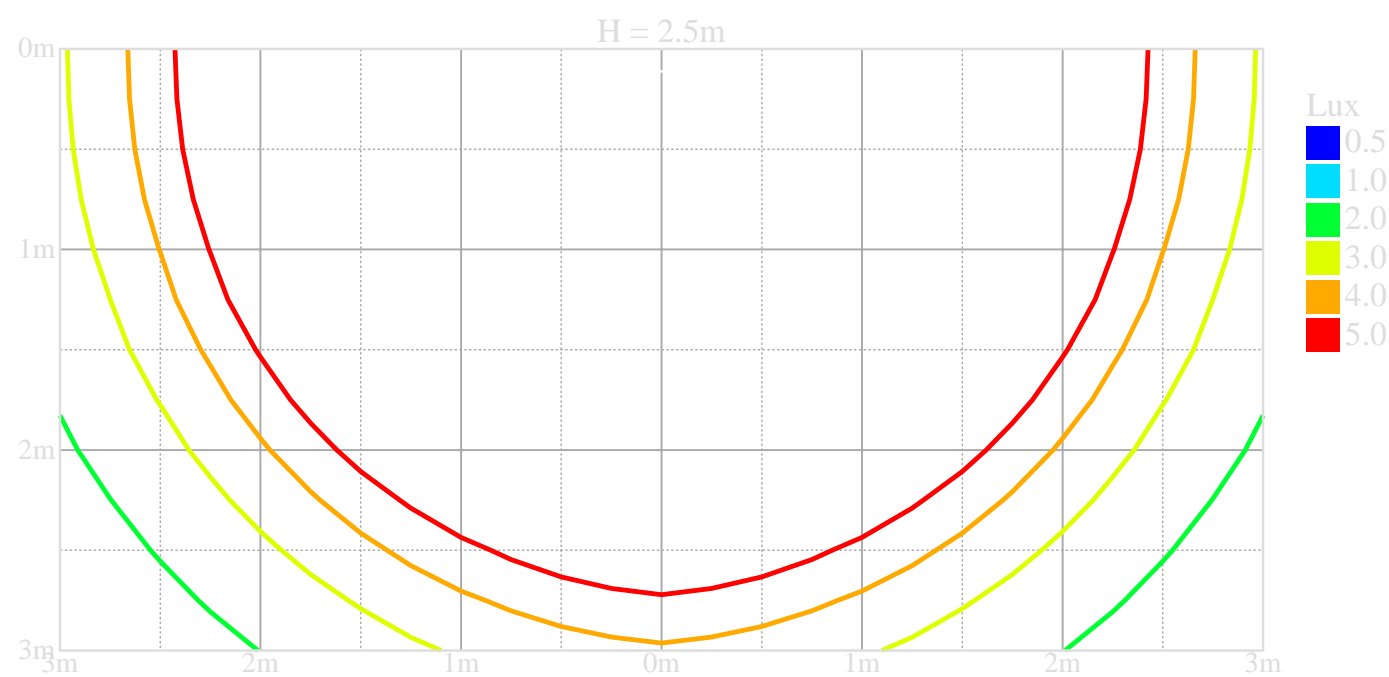

## Dimensional drawing

