


K9R01/3N-230

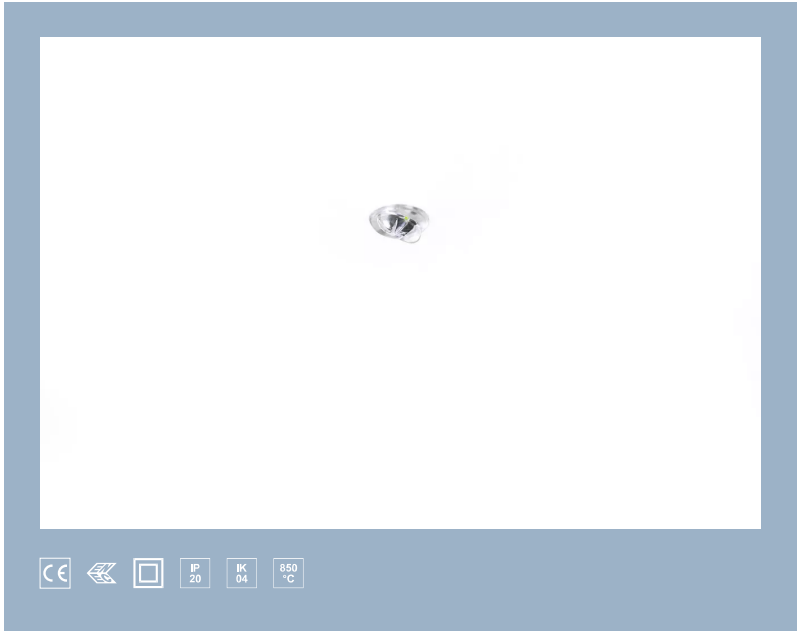

recessed luminaire • round

Application :	General office area's, General healthcare area's
housing:	heat sink in extruded aluminium
light source :	LED • 5000 K
optics :	lens • acrylic (PMMA)
Lumen output in emergency mode :	210 lm
function:	escape route lighting
monitoring:	central supply (230V)
photobiological safety:	EN 62471: RISK GROUP 1 UNLIMITED

Product information

Mechanical properties

dimensions :	30 mm x 32 mm
cut-out size :	24 mm x 32 mm
colour:	RAL9003 - signal white
IP:	IP20
IK:	IK04
ambient temperature:	-20°C - 35°C •

Battery


mode of operation :	non-maintained
---------------------	----------------

Electrical properties

power :	3.4 W
voltage:	220-230V
frequency :	50-60Hz AC/DC

Luminance


luminous flux : 210 lm

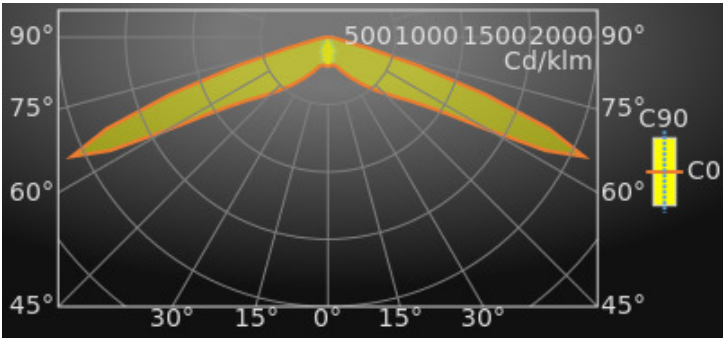

This document has been compiled by ETAP with the greatest possible care. However, the information contained in this publication is not binding and may change due to technical development. ETAP is not liable for any damage whatsoever resulting from the use of this document.

www.etaplighting.com // Made in Belgium

Distance tables: ceiling mounted

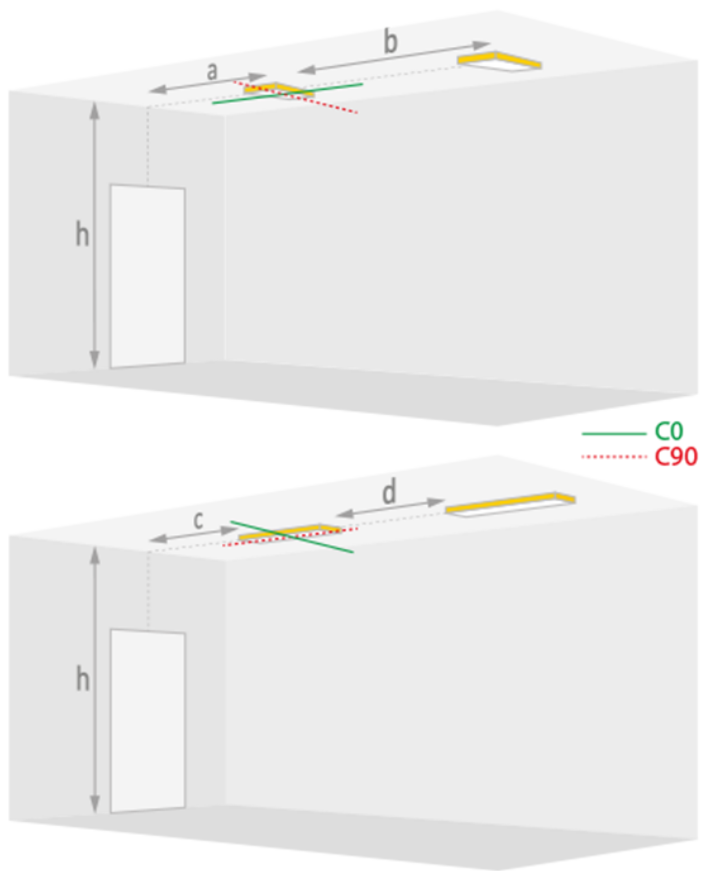

ER Ceiling for 1.0 Lux and 210 lm

H (m)	a	b	c	d
2.6	7.6	16.7	1.7	3.8
2.8	8.0	17.7	1.8	4.0
3.0	8.4	18.6	1.9	4.2
3.5	9.3	20.8	2.0	4.7
4.0	10.1	22.9	2.1	5.1
4.5	10.9	24.7	1.9	5.6
5.0	11.5	26.5	1.6	5.6
6.0	8.3	29.8	1.3	5.6
7.0	0.4	21.6	0.3	4.8
8.0	---	19.9	---	4.0

Available accessories

K9RH85X1 *Adaptation plate for K5 renovation (RAL9003)*

K9RH85X2 *Adaptation plate for K5 renovation (RAL9006)*

Dimensional drawing

