

K9R143/1-AX2S11



surface-mounted luminaire • linear

Application : General office area's, General healthcare area's

housing: powder coated die-cast zamak

light source : LED • 5000 K

optics : sign plate with dot-matrix • acrylic (PMMA)

Lumen output in emergency mode : 80 lm

function: double sided signage

monitoring: DALI

photobiological safety: EN 62471: RISK GROUP 0
UNLIMITED

Product information

Mechanical properties

dimensions : 324 mm x 26 mm x 63 mm

colour: RAL9006 - white aluminium (textured)

IP: IP42

IK: IK04

ambient temperature: 5°C - 35°C •

Electrical properties

power : 2.5 W

voltage: 220-230V

frequency : 50-60Hz AC

Battery

mode of operation : adjustable: non-maintained/maintained


Battery: 4 x NiMh 1,2V 1,1Ah

autonomy : 90 minutes

Luminance


luminous flux : 80 lm

distance of perception : 24

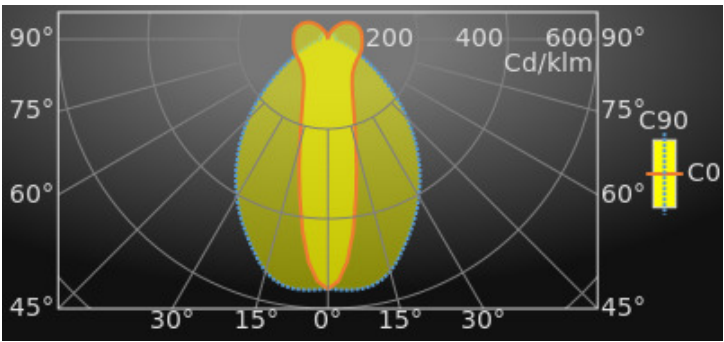

distance of perception : 24

Isolux diagram - wall mounting

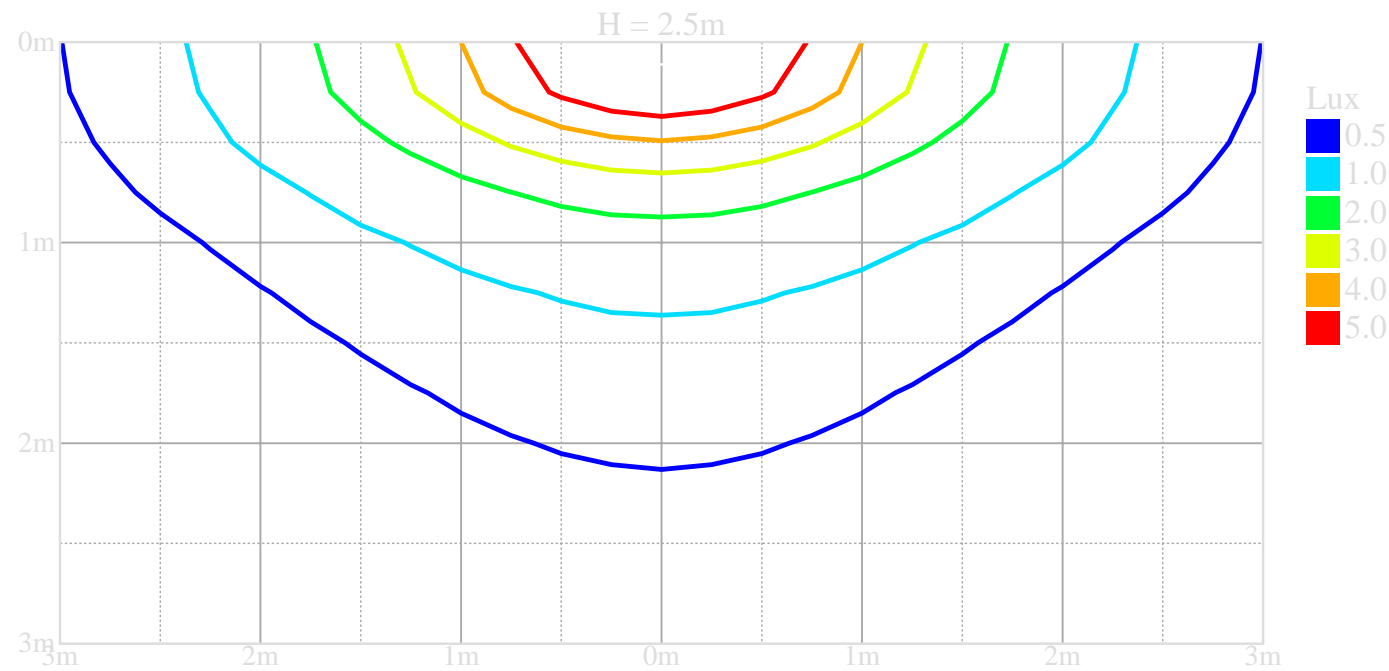

Available accessories

K9RH4-50X2 *Suspension set (RAL9006-white aluminium)*

Dimensional drawing

