

# K9R142/1X1S3

surface-mounted luminaire • linear

*application* : Office, Healthcare, Education, Horeca, Retail, Leisure

*light source* : low power LED • 5000 K

*Lumen output in emergency mode* : 20 lm

*function*: lighting/double sided signage

*self test*: With extensive self-test EST+

*photobiological safety*: EN 62471: RISK GROUP 0 UNLIMITED



## Mechanical properties

*dimensions* : 324 mm x 26 mm x 63 mm

*colour*: RAL9003 - white (textured)

*IP*: IP42

*ambient temperature*: from 5°C to 35°C •

## Electrical properties

*power* : 2.4 W

*voltage*: 220-230V

*frequency* : 50-60Hz AC

## Battery

*mode of operation* : adjustable: non-maintained/maintained


*Battery*: 4 x NiMh 1,2V 1,1Ah

*autonomy* : 480 minutes

## Luminance

*luminous flux* : 20 lm


*distance of perception* : 26

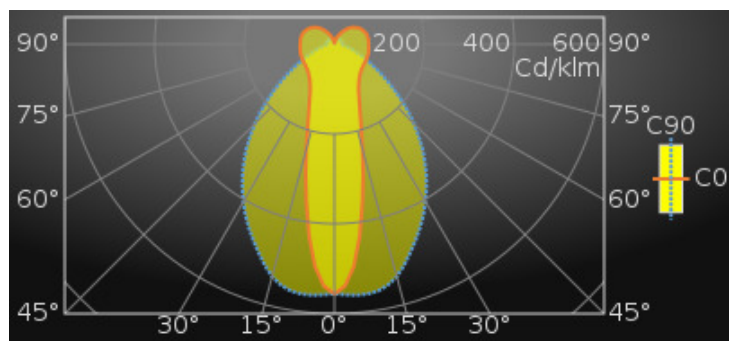

*distance of perception* : 26

# K9R142/1X1S3

## Isolux diagram - wall mounting

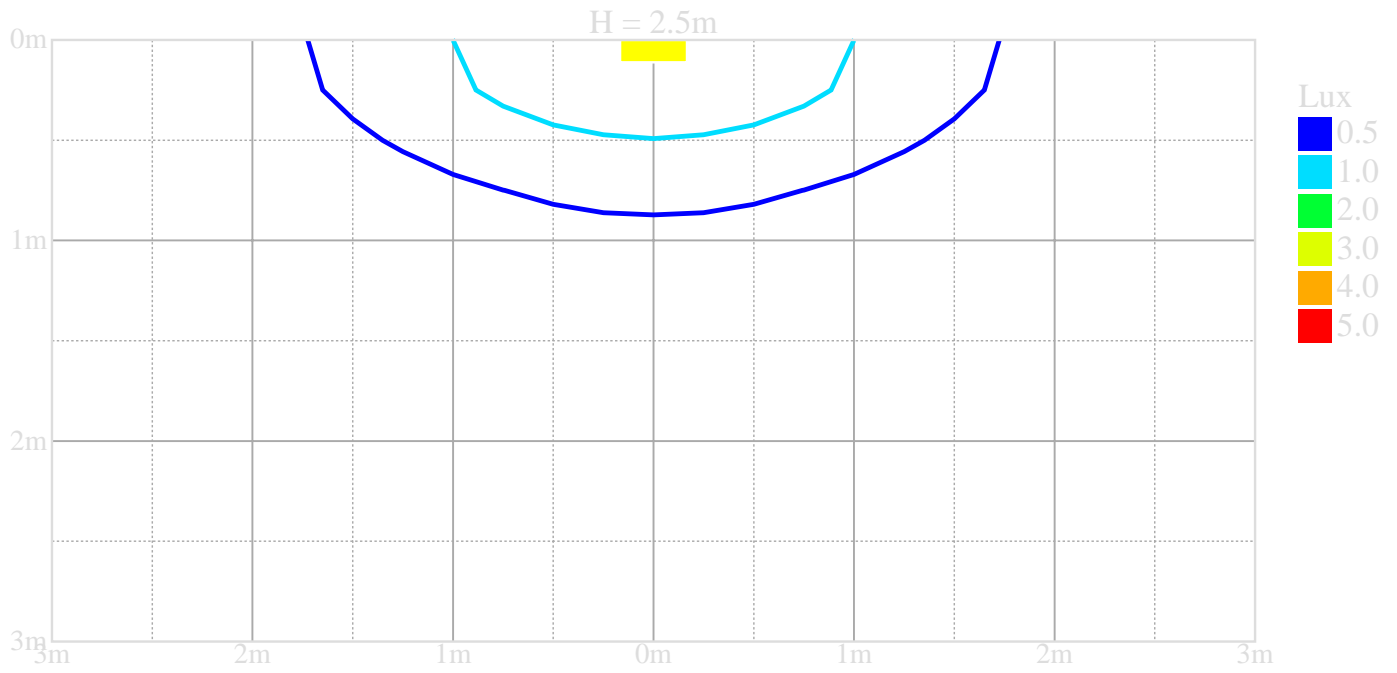

# K9R142/1X1S3

## Available accessories

K9RH4-50X1 *Suspension set (RAL9003-white)*

## Dimensional drawing

