


K9R023/3N-AS11-B320B320

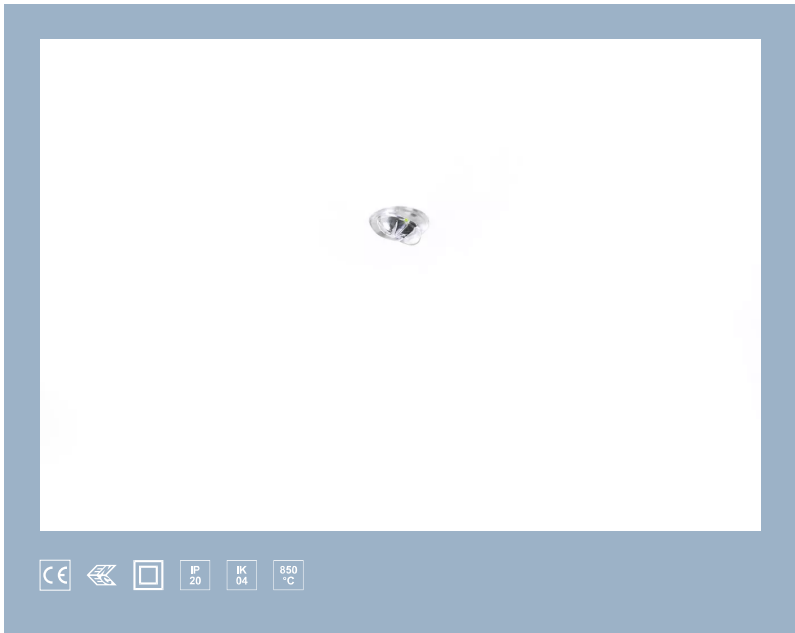

recessed luminaire • round

- Application : General office area's, General healthcare area's
- housing: heat sink in extruded aluminium
- light source : LED • 5000 K
- optics : lens • acrylic (PMMA)
- Lumen output in emergency mode : 220 lm
- function: anti-panic lighting
- monitoring: DALI
- photobiological safety: EN 62471: RISK GROUP 1 UNLIMITED

Product information

Mechanical properties

- dimensions : 30 mm x 32 mm
- cut-out size : 24 mm x 32 mm
- colour: RAL9003 - signal white
- IP: IP20
- IK: IK04
- ambient temperature: 5°C - 35°C •

Battery

- mode of operation : non-maintained
- Battery: 4 x NiMh 1,2V 2,2Ah
- autonomy : 90 minutes

Electrical properties


- power : 0.9 W
- voltage: 220-230V
- frequency : 50-60Hz AC




This document has been compiled by ETAP with the greatest possible care. However, the information contained in this publication is not binding and may change due to technical development. ETAP is not liable for any damage whatsoever resulting from the use of this document.
www.etaplighting.com // Made in Belgium

Luminance

luminous flux : 220 lm

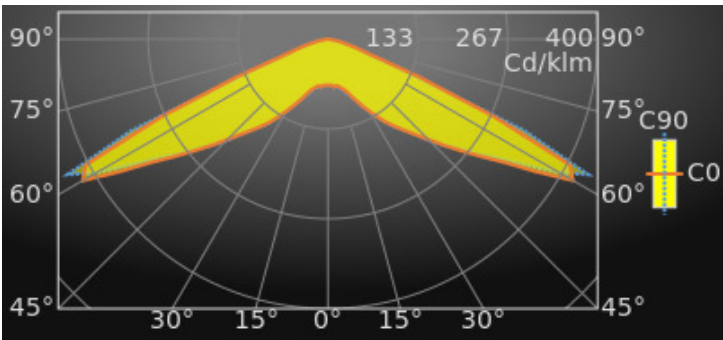

Distance tables: ceiling mounted

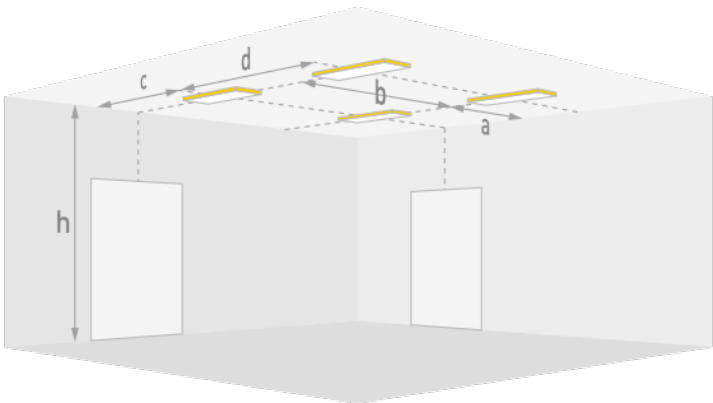

AP Ceiling for 0.5 Lux and 220 lm

H (m)	a	b	c	d
2.6	5.1	12.4	5.2	12.4
2.8	---	13.2	5.4	13.2
3.0	5.6	13.9	5.7	13.9
3.5	6.1	15.7	6.2	15.7
4.0	6.6	17.3	6.6	17.3
4.5	3.7	17.5	3.7	17.5
5.0	1.2	14.8	1.2	14.8
6.0	---	15.0	---	15.0
7.0	---	15.4	---	15.4
8.0	---	16.2	---	16.2
10.0	12.3	4.6	11.1	4.6

AP Ceiling for 1.0 Lux and 220 lm

H (m)	a	b	c	d
2.6	4.5	11.5	4.5	11.5
2.8	4.7	12.1	4.7	12.1
3.0	3.3	12.8	3.3	12.8
3.5	0.9	10.5	0.9	10.5
4.0	0.5	10.6	0.6	10.6
4.5	0.2	10.5	0.1	10.5
5.0	0.1	10.9	---	10.9
6.0	---	11.7	---	11.7
7.0	8.9	3.3	8.1	3.3

Available accessories

K9RH85X1 *Adaptation plate for K5 renovation (RAL9003)*

K9RH85X2 *Adaptation plate for K5 renovation (RAL9006)*

K9RH5 *Test button set*

Dimensional drawing

