

# K9R142/1-AX2



surface-mounted luminaire • linear

application : Office, Healthcare, Education, Horeca, Retail, Leisure

housing: powder coated die-cast zamak

light source : LED LP • 5000 K

Lumen output in emergency mode : 80 lm

function: double sided signage

self test: EST+ extensive self-test

photobiological safety: EN 62471: RISK GROUP 0 UNLIMITED

## Product information

### Mechanical properties

colour: RAL9006 - white aluminium (textured)

IP: IP42

ambient temperature: from 5°C to 35°C •

### Electrical properties

power : 2.5 W

voltage: 220-230V

frequency : 50-60Hz AC

### Battery

mode of operation : adjustable: non-maintained/maintained


Battery: 4 x NiMh 1,2V 1,1Ah

autonomy : \*90 minutes

## Luminance


luminous flux : 80 lm

distance of perception : 24

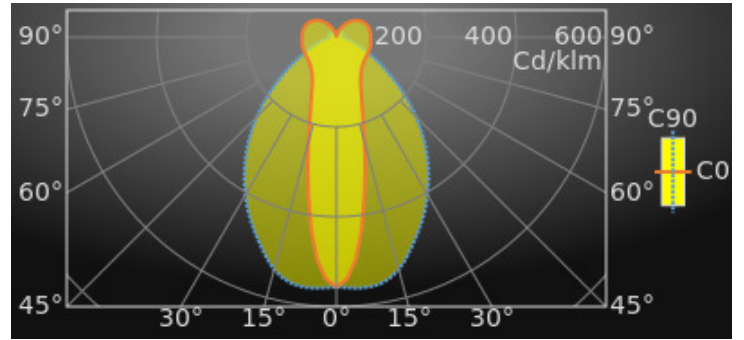

distance of perception : 24

## Isolux diagram - wall mounting

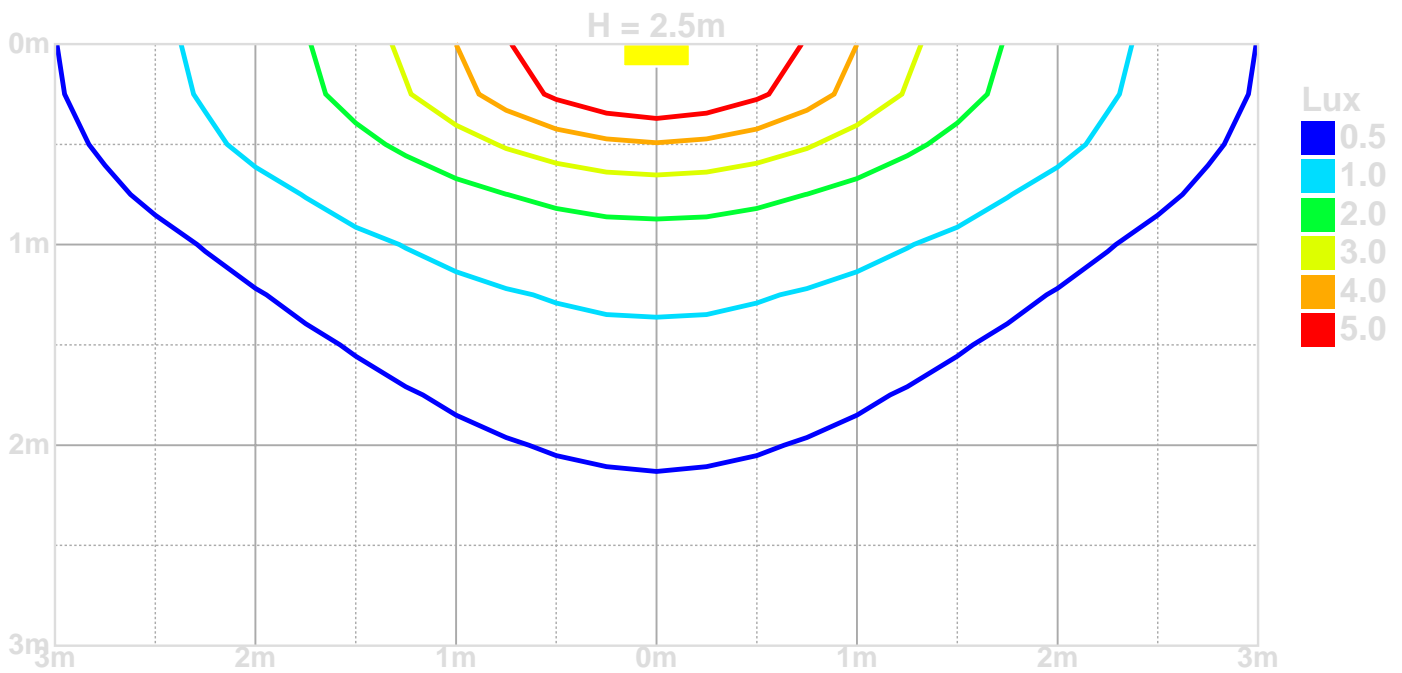

## Available accessories

K9RH4-50X2 Suspension set (RAL9006-white aluminium)

## Dimensional drawing

