

K9R142/1-AX1

surface-mounted luminaire • linear

application : Office, Healthcare, Education, Horeca, Retail, Leisure

housing: lacquered ZAMAK

light source : low power LED • 5000 K

Lumen output in emergency mode : 80 lm

function: lighting/double sided signage

self test: With extensive self-test EST+

photobiological safety: EN 62471: RISK GROUP 0 UNLIMITED



Mechanical properties

dimensions : 324 mm x 26 mm x 63 mm

colour: RAL9003 - white (textured)

IP: IP42

ambient temperature: from 5°C to 35°C •

Electrical properties

power : 2.5 W

voltage: 220-230V

frequency : 50-60Hz AC

Battery

mode of operation : adjustable: non-maintained/maintained


Battery: 4 x NiMh 1,2V 1,1Ah

autonomy : *90 minutes

Luminance

luminous flux : 80 lm


distance of perception : 24

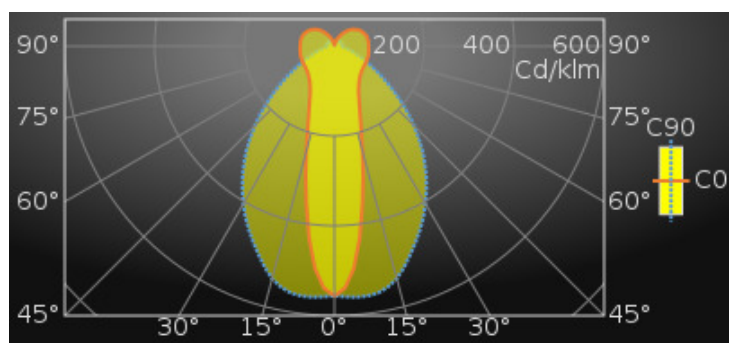

distance of perception : 24

K9R142/1-AX1

Isolux diagram - wall mounting

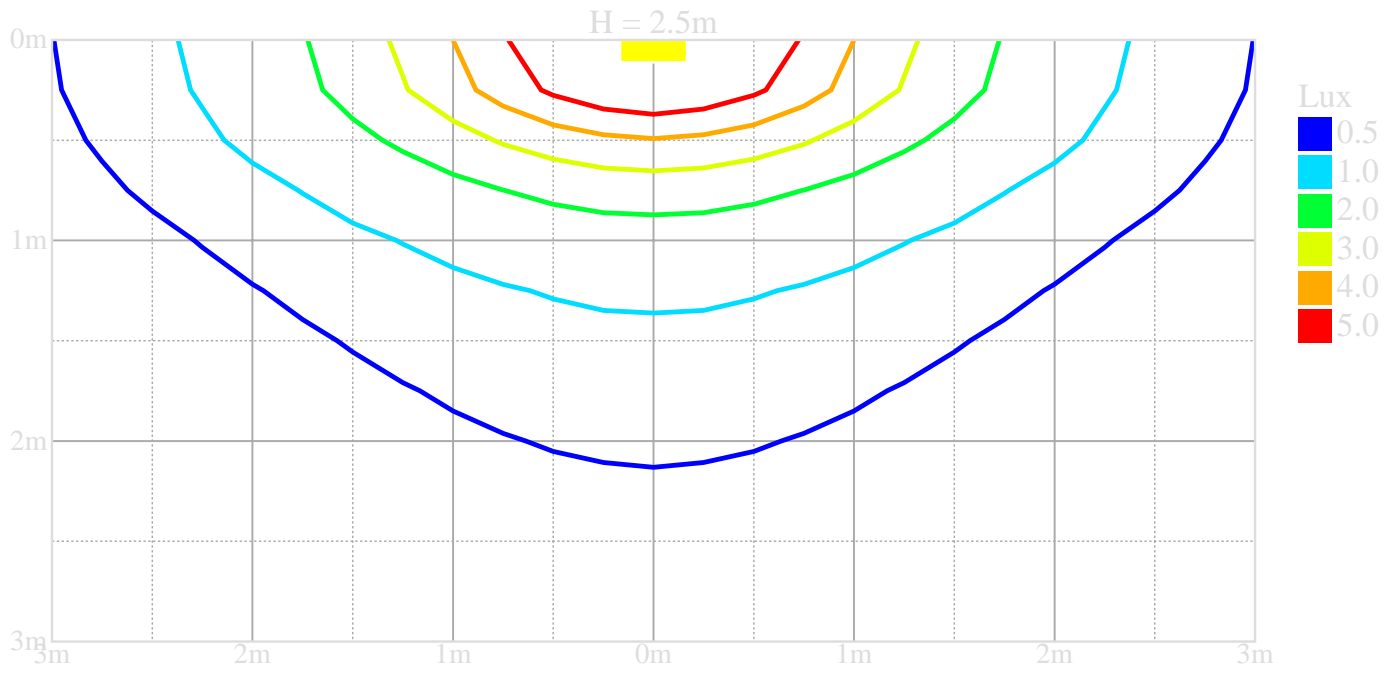

K9R142/1-AX1

Available accessories

K9RH4-50X1 *Suspension set (RAL9003-white)*

Dimensional drawing

