

K9R14/1-230X2



surface-mounted luminaire • linear

application : Office, Healthcare, Education, Horeca, Retail, Leisure

housing: lacquered ZAMAK

light source : LED LP • 5000 K

Lumen output in emergency mode : 80 lm

function: double sided signage

self test: for central supply - 230V

photobiological safety: EN 62471: RISK GROUP 0 UNLIMITED

Product information

Mechanical properties

colour: RAL9006 - white aluminium (textured)

IP: IP42

ambient temperature: from -20°C to 35°C •

Luminance

luminous flux : 80 lm


distance of perception : 26

Electrical properties

power : 3.7 W

voltage: 220-230V


frequency : 50-60Hz AC/DC

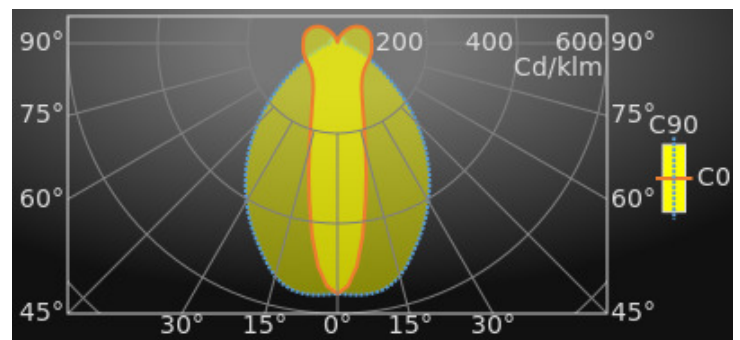

distance of perception : 26



Isolux diagram - wall mounting

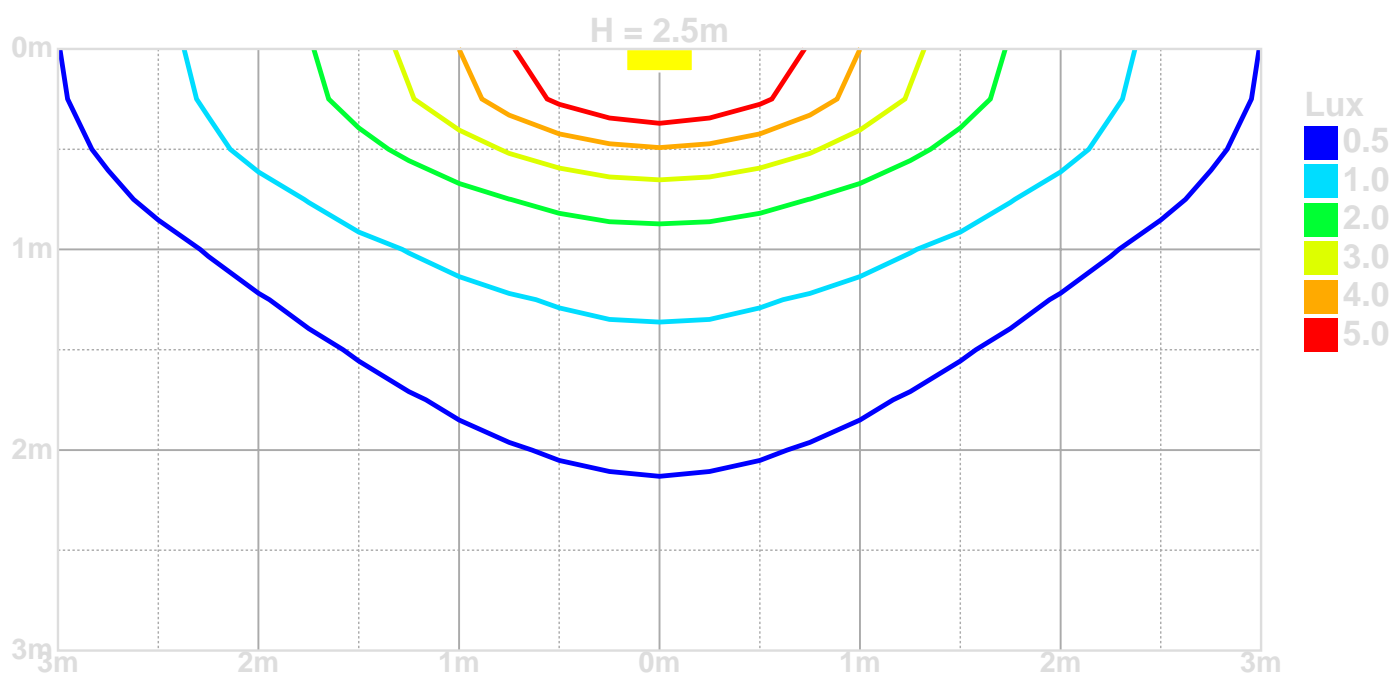

Available accessories

K9RH4-50X2 *Suspension set (RAL9006-white aluminium)*

Dimensional drawing

