


K9R14/1-230X2C3

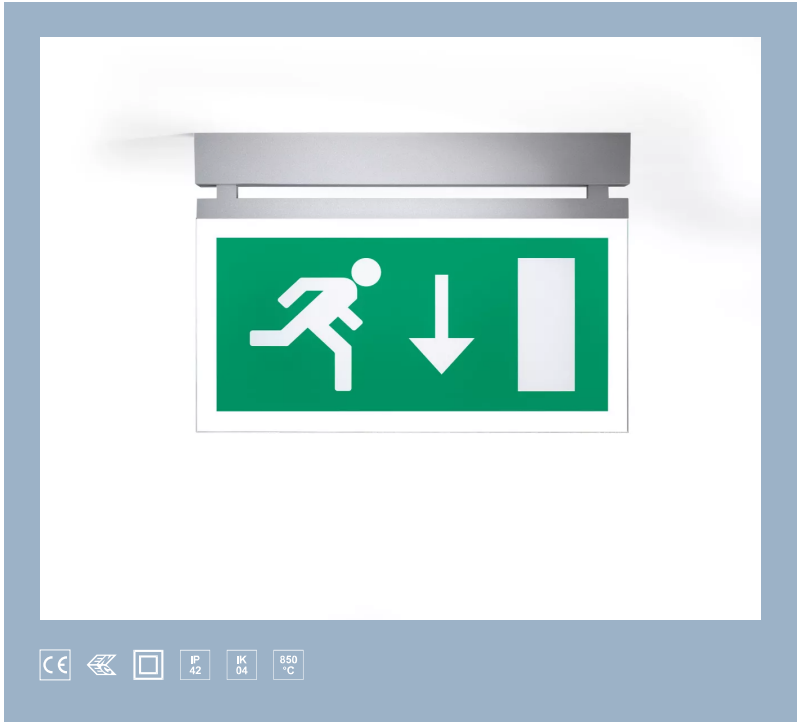

surface-mounted luminaire • linear

- Application : General office area's, General healthcare area's
- housing: powder coated die-cast zamak
- light source : LED • 5000 K
- optics : sign plate with dot-matrix • acrylic (PMMA)
- Lumen output in emergency mode : 100 lm
- function: double sided signage
- monitoring: for central supply (230V) with FLEX2
- photobiological safety: EN 62471: RISK GROUP 0 UNLIMITED

Product information

Mechanical properties

- dimensions : 324 mm x 26 mm x 63 mm
- colour: RAL9006 - white aluminium (textured)
- IP: IP42
- IK: IK04
- ambient temperature: -10°C - 35°C •

Battery

- mode of operation : maintained


Electrical properties

- power : 4.6 W
- voltage: 220-230V
- frequency : 50-60Hz AC/DC

Luminance


luminous flux : 100 lm

distance of perception : 26

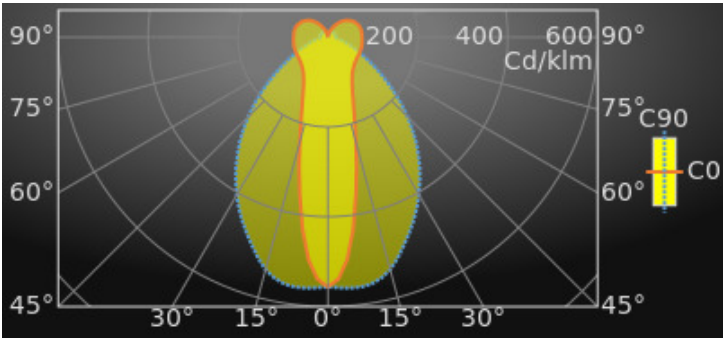

distance of perception : 26

Isolux diagram - wall mounting

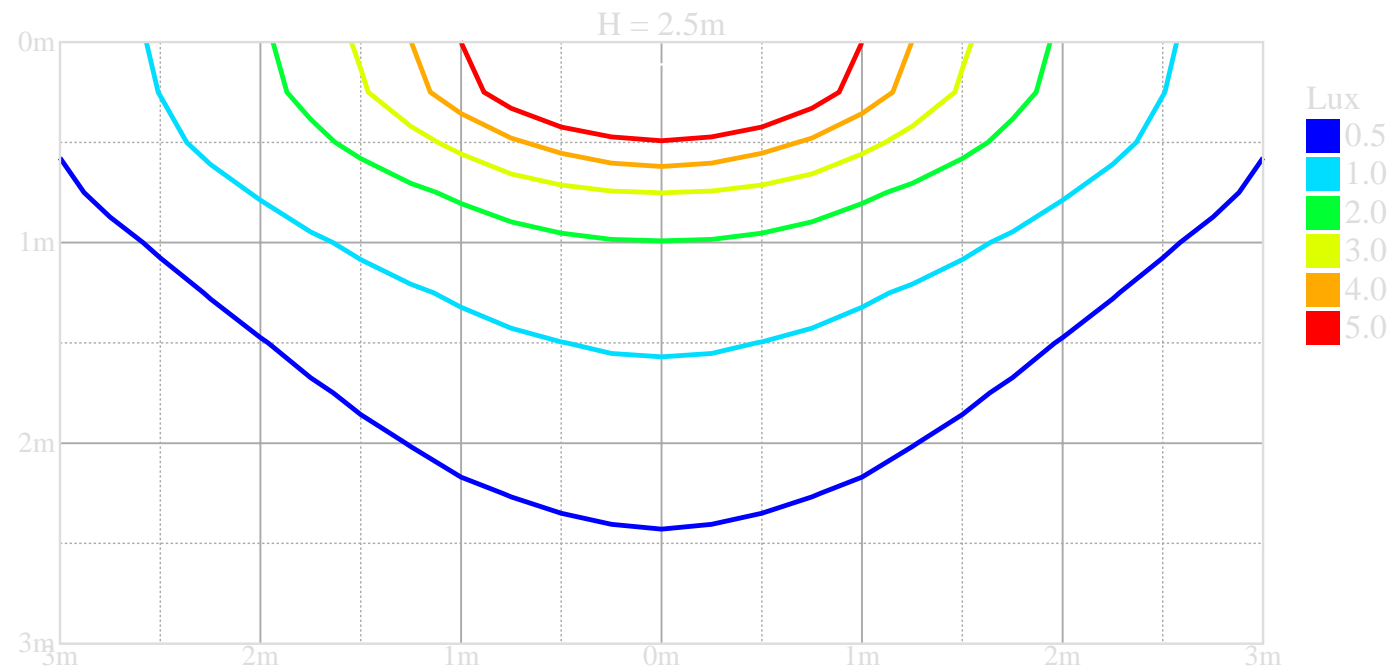

Available accessories

K9RH4-50X2 Suspension set (RAL9006-white aluminium)

Dimensional drawing

