

K9R142/1X1S2



surface-mounted luminaire • linear

- Application : General office area's, General healthcare area's
- housing: powder coated die-cast zamak
- light source : LED • 5000 K
- optics : sign plate with dot-matrix • acrylic (PMMA)
- Lumen output in emergency mode : 50 lm
- function: double sided signage
- monitoring: EST+ self-test
- photobiological safety: EN 62471: RISK GROUP 0 UNLIMITED

Product information

Mechanical properties

- dimensions : 324 mm x 26 mm x 63 mm
- colour: RAL9003 - white (textured)
- IP: IP42
- IK: IK04
- ambient temperature: 5°C - 35°C •

Battery

- mode of operation : adjustable: non-maintained/maintained
- Battery: 4 x NiMh 1,2V 1,1Ah
- autonomy : 180 minutes


Electrical properties

- power : 2.5 W
- voltage: 220-230V
- frequency : 50-60Hz AC

Luminance


luminous flux : 50 lm

distance of perception : 26

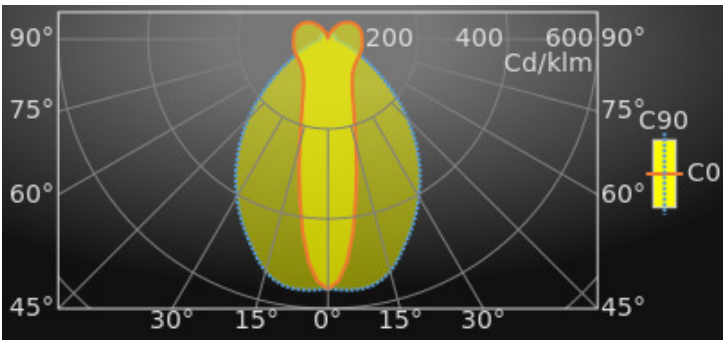

distance of perception : 26

Isolux diagram - wall mounting

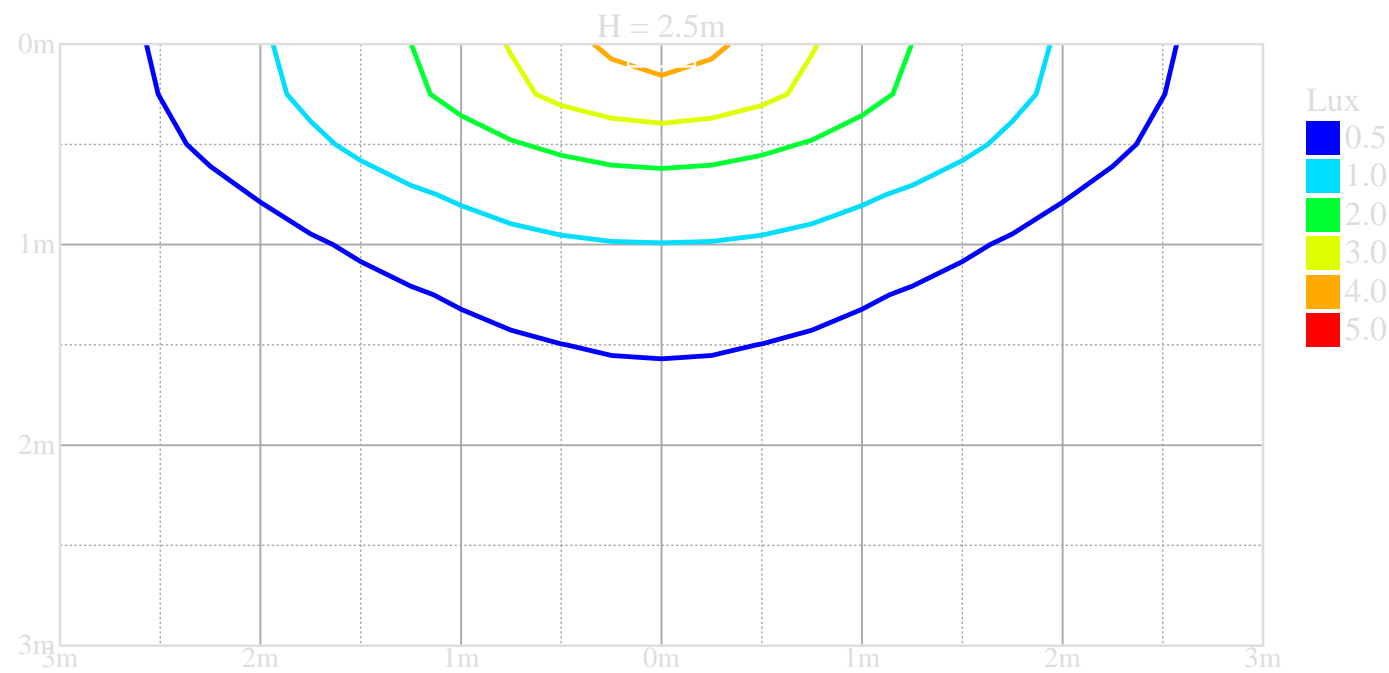

Available accessories

K9RH4-50X1 *Suspension set (RAL9003-white)*

Dimensional drawing

