

K9R142/1X1S4



surface-mounted luminaire • linear

- Application : General office area's, General healthcare area's
- housing: powder coated die-cast zamak
- light source : LED • 5000 K
- optics : sign plate with dot-matrix • acrylic (PMMA)
- Lumen output in emergency mode : 80 lm
- function: double sided signage
- monitoring: EST+ self-test with remote control
- photobiological safety: -

Product information

Mechanical properties

- dimensions : 324 mm x 26 mm x 63 mm
- colour: RAL9003 - white (textured)
- IP: IP42
- IK: IK04
- ambient temperature: 5°C - 35°C •

Battery

- mode of operation : adjustable: non-maintained/maintained
- Battery: 4 x NiMh 1,2V 1,1Ah
- autonomy : 60 minutes

Electrical properties

- power : 2.4 W
- voltage: 220-230V
- frequency : 50-60Hz AC




This document has been compiled by ETAP with the greatest possible care. However, the information contained in this publication is not binding and may change due to technical development. ETAP is not liable for any damage whatsoever resulting from the use of this document.
www.etaplighting.com // Made in Belgium

Luminance


luminous flux : 80 lm

distance of perception : 26

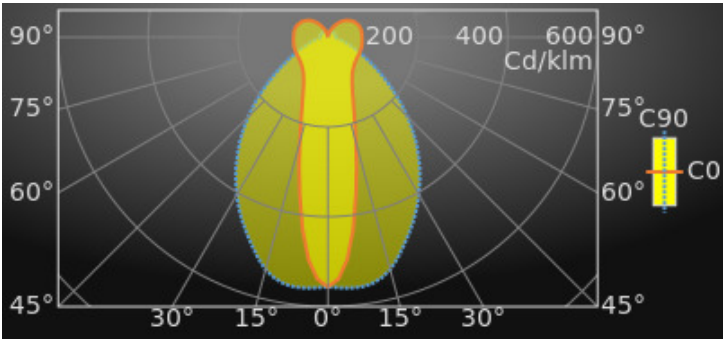

distance of perception : 26

Isolux diagram - wall mounting

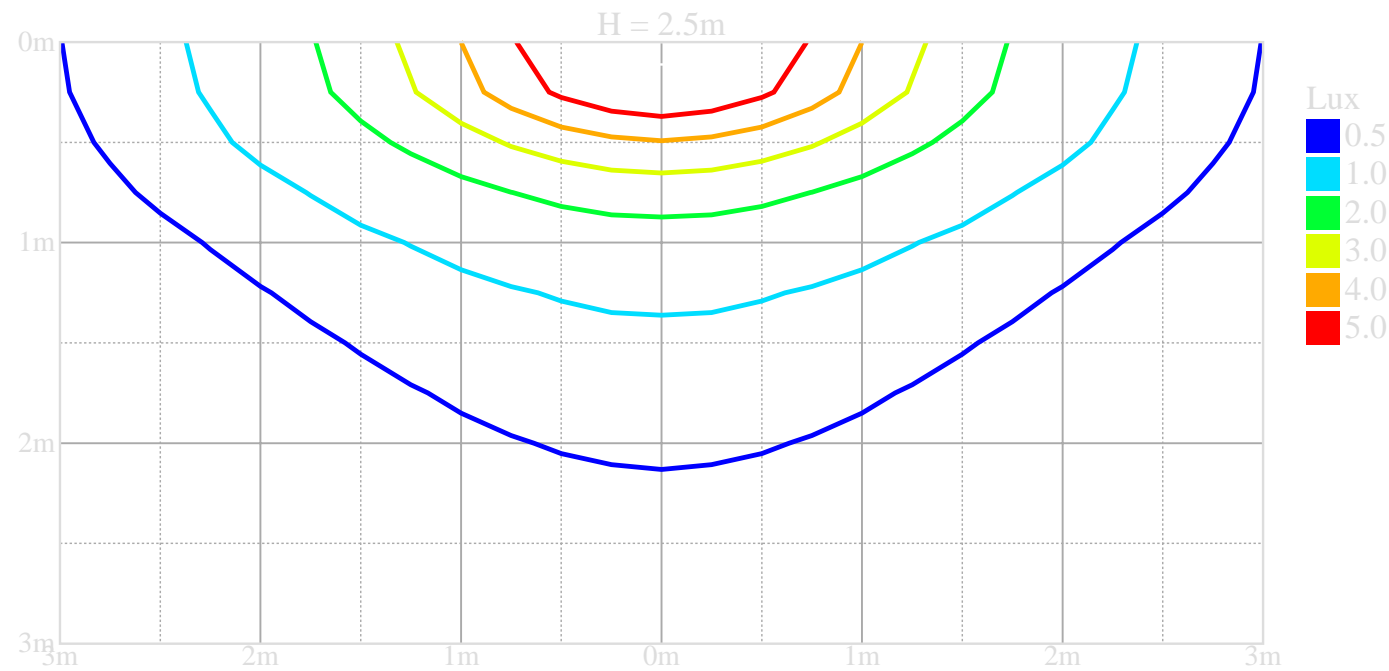

Available accessories

K9RH4-50X1 *Suspension set (RAL9003-white)*

Dimensional drawing

