

# K9R142/1X2S2



**surface-mounted luminaire • linear**

**Application :** General office area's, General healthcare area's

**housing:** powder coated die-cast zamak

**light source :** LED • 5000 K

**optics :** sign plate with dot-matrix • acrylic (PMMA)

**Lumen output in emergency mode :** 50 lm

**function:** double sided signage

**monitoring:** EST+ self-test

**photobiological safety:** EN 62471: RISK GROUP 0  
UNLIMITED

## Product information

### Mechanical properties

**dimensions :** 324 mm x 26 mm x 63 mm

**colour:** RAL9006 - white aluminium (textured)

**IP:** IP42

**IK:** IK04

**ambient temperature:** 5°C - 35°C •

### Electrical properties

**power :** 2.5 W

**voltage:** 220-230V

**frequency :** 50-60Hz AC

### Battery

**mode of operation :** adjustable: non-maintained/maintained


**Battery:** 4 x NiMh 1,2V 1,1Ah

**autonomy :** 180 minutes

Luminance


luminous flux : 50 lm

distance of perception : 26

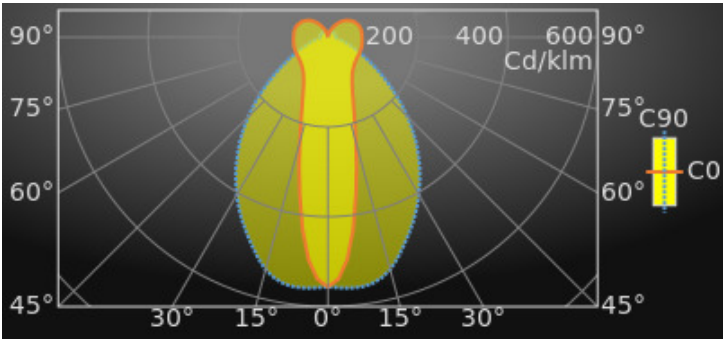

distance of perception : 26

Isolux diagram - wall mounting

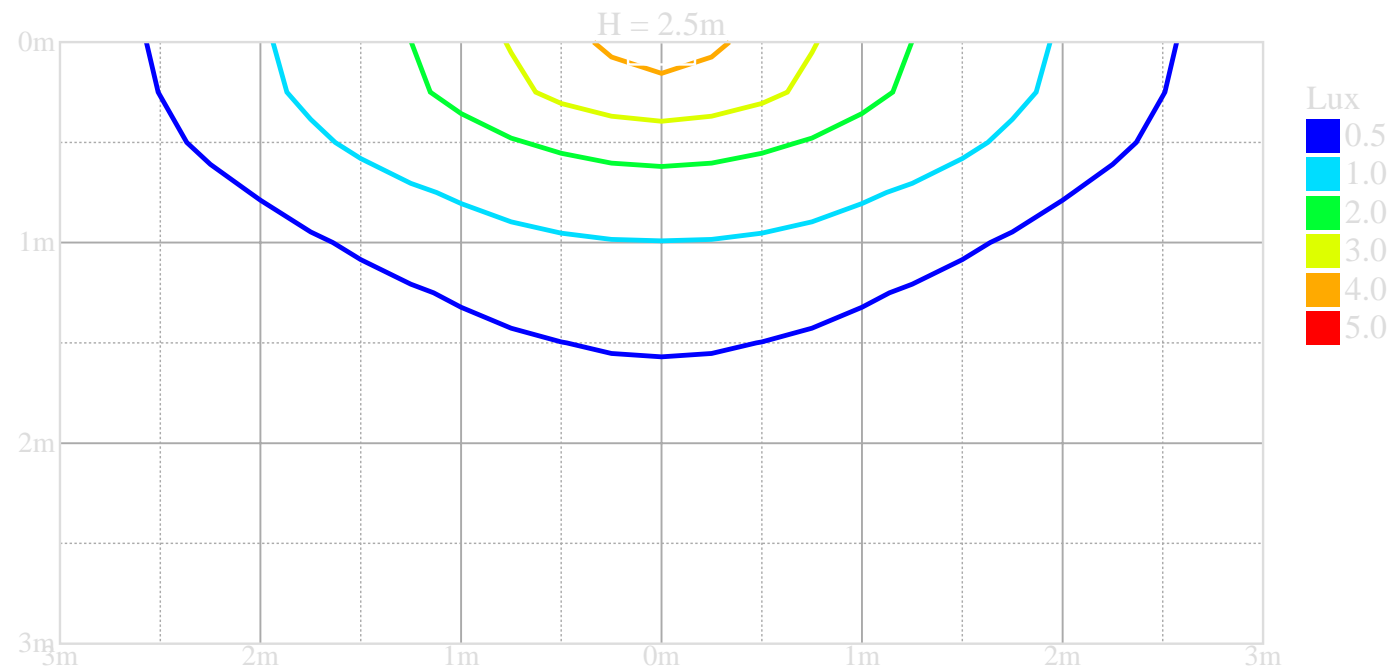

Available accessories

K9RH4-50X2 Suspension set (RAL9006-white aluminium)

Dimensional drawing

