

K9R142/1X2S24

surface-mounted luminaire • linear

application : Office, Healthcare, Education, Horeca, Retail, Leisure

housing: lacquered ZAMAK

light source : low power LED • 5000 K

Lumen output in emergency mode : 50 lm

function: lighting/double sided signage

self test: With extensive self-test EST+ with remote control

photobiological safety: EN 62471: RISK GROUP 0 UNLIMITED



Mechanical properties

dimensions : 324 mm x 26 mm x 63 mm

colour: RAL9006 - white aluminium (textured)

IP: IP42

ambient temperature: from 5°C to 35°C •

Battery

mode of operation : adjustable: non-maintained/maintained

Battery: 4 x NiMh 1,2V 1,1Ah

autonomy : 180 minutes

Luminance

luminous flux : 50 lm


distance of perception : 26

Electrical properties

power : 2.4 W

voltage: 220-230V


frequency : 50-60Hz AC

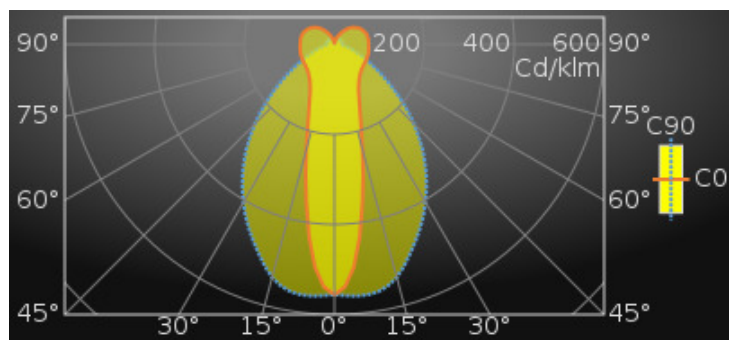

distance of perception : 26

K9R142/1X2S24

Isolux diagram - wall mounting

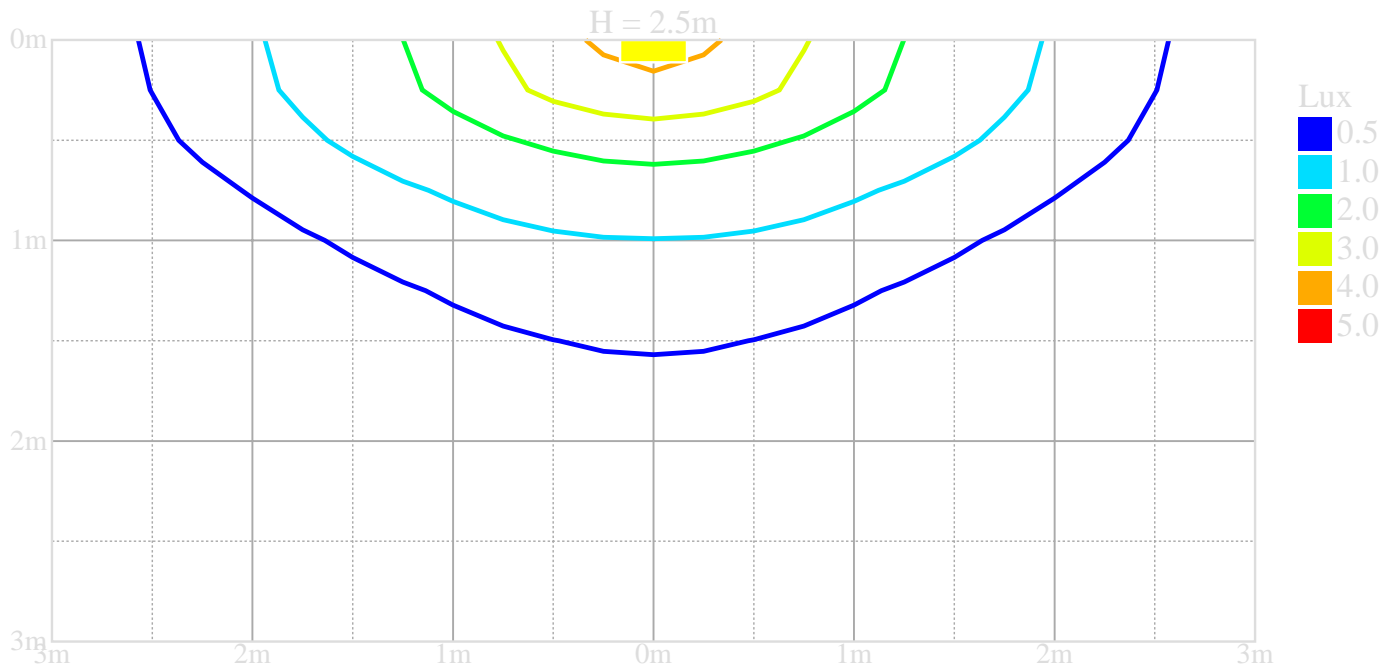

K9R142/1X2S24

Available accessories

K9RH4-50X2 *Suspension set (RAL9006-white aluminium)*

Dimensional drawing

