


K1R143/1S11

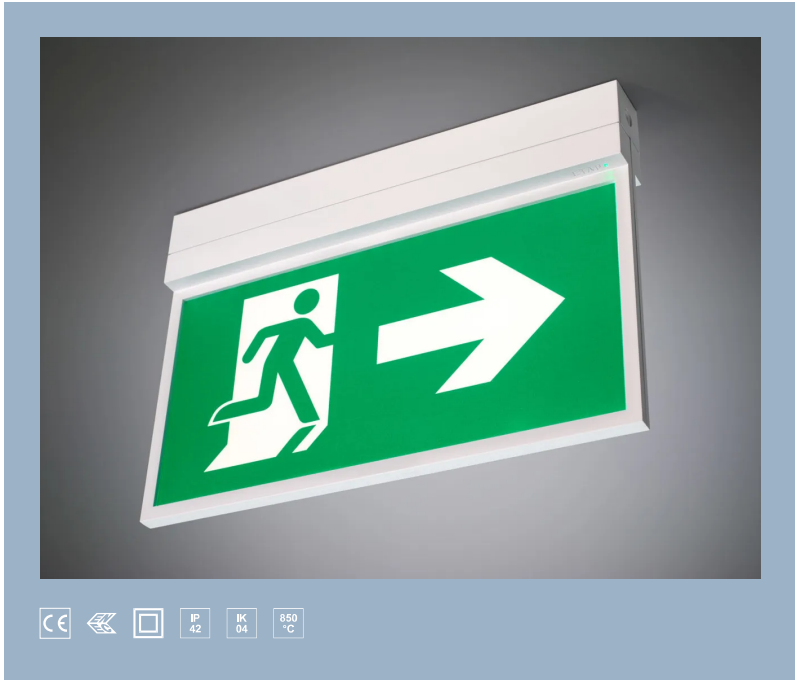

surface-mounted luminaire • linear

- Application : Education ? Emergency lighting, Offices ? Emergency lighting, Healthcare ? Emergency lighting
- housing: impact-resistant polycarbonate
- light source : LED • 5000 K
- optics : sign plate with dot-matrix • acrylic (PMMA)
- Lumen output in emergency mode : 90 lm
- function: double sided signage
- monitoring: DALI
- photobiological safety: EN 62471: RISK GROUP 0 UNLIMITED

Product information

Mechanical properties

- dimensions : 315 mm x 33 mm x 219 mm
- colour: RAL9003 - white
- IP: IP42
- IK: IK04
- ambient temperature: 5°C - 35°C •

Battery

- mode of operation : adjustable: non-maintained/maintained
- Battery: 4 x NiMh 1,2V 1,1Ah
- autonomy : 60 minutes

Electrical properties

- power : 2.8 W
- voltage: 220-230V
- frequency : 50-60Hz AC

Luminance

luminous flux : 90 lm

distance of perception : 29

distance of perception : 29

Available accessories

K1RH0110 *Recessed mounting frame*

K1RH0120 *Right angle wall bracket*

K1RH0130 *Adaptation plate for K5 renovation*

K1RH0140-0500 *Suspension set, 0,5 m*

K1RH0140-1000 *Suspension set, 1 m*

K1RH0140-2000 *Suspension set, 2 m*

K1RH0170 *Protective grille*

K1RH0190 *Accessory for through wiring and/or surface mounted cabling*

K9RH5 *Test button set*

Dimensional drawing

