

# R3118/LEDN440DX1



surface-mounted luminaire • square

Application : Workspaces, Classrooms

housing: lacquered sheet steel

light source : LED • 4000 K

optics : Shielded lens • polycarbonate (PC) with aluminium thin film • medium wide-angle

UGR classification : <=19

luminous flux: 4150 lm

luminous efficacy : 143 lm/W

LLMF: 98% @ 50khrs (Tq=25°C)

## Product information

### Mechanical properties

dimensions : 630 mm x 630 mm x 35 mm

colour: RAL9003 - white (textured)

type : individual luminaire

IP: IP20

### Electrical properties

driver: DALI dimmable

power : 29 W

voltage : 220-240V

frequency : 50-60Hz AC

photobiological safety : EN 62471: RISK GROUP 1  
UNLIMITED

Luminance


luminous flux : 4150 lm

luminous efficacy : 143 lm/W

UGR classification =: <=19

luminous area : 0.12 m²

| Average Luminances (Cd/m²) for 4150lm |       |       |       |       |       |
|---------------------------------------|-------|-------|-------|-------|-------|
| Gamma                                 | C0    | C30   | C45   | C60   | C90   |
| 45°                                   | 11464 | 13066 | 13775 | 13313 | 12876 |
| 50°                                   | 8845  | 11027 | 11880 | 11508 | 10489 |
| 55°                                   | 4993  | 7935  | 9845  | 9300  | 6480  |
| 60°                                   | 3118  | 4859  | 6805  | 5149  | 3086  |
| 65°                                   | 949   | 1921  | 3075  | 2445  | 2131  |
| 70°                                   | 548   | 696   | 1022  | 1517  | 1385  |
| 75°                                   | 397   | 456   | 560   | 866   | 1140  |
| 80°                                   | 109   | 232   | 324   | 469   | 908   |
| 85°                                   | 1     | 0     | 16    | 93    | 642   |

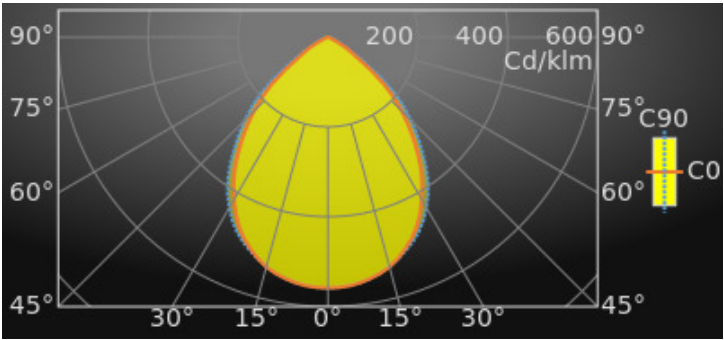

Classifications

CIE: 681 / 963 / 997 / 1000 / 1000

CIE FLUXCODE : 0.68 / 0.96 / 1.00 / 1.00 / 1.00

BZ: BZ2

CAE: Symmetrical

DIN: A50 (Nach Arbeitsblatt 7)

DIN\_U: Phi u = 1.00

DIN\_SU: Phi su = 0.70

UTE: 1.00 C + 0.00 T



This document has been compiled by ETAP with the greatest possible care. However, the information contained in this publication is not binding and may change due to technical development. ETAP is not liable for any damage whatsoever resulting from the use of this document.  
www.etaplighting.com // Made in Belgium

Lifetime Data (Tq=25.0°C)

| Time(khrs) | LLMF(%) | Cx(%) |
|------------|---------|-------|
| 10         | 99      | 1     |
| 20         | 99      | 2     |
| 30         | 99      | 3     |
| 40         | 98      | 4     |
| 50         | 98      | 5     |
| 60         | 98      | 6     |

## Luminous intensities in cd

Intensity for 4150lm

| Gamma | C0     | C45    | C90    |
|-------|--------|--------|--------|
| 0°    | 2318.1 | 2318.1 | 2318.1 |
| 5°    | 2305.9 | 2299.9 | 2298.0 |
| 10°   | 2264.6 | 2262.0 | 2262.4 |
| 15°   | 2197.6 | 2194.1 | 2191.0 |
| 20°   | 2084.3 | 2097.2 | 2099.0 |
| 25°   | 1937.8 | 1976.6 | 1985.5 |
| 30°   | 1731.2 | 1807.1 | 1819.1 |
| 35°   | 1498.0 | 1619.8 | 1609.1 |
| 40°   | 1231.4 | 1386.8 | 1341.3 |
| 45°   | 963.0  | 1157.1 | 1081.7 |
| 50°   | 675.4  | 907.2  | 801.0  |
| 55°   | 340.2  | 670.9  | 441.6  |
| 60°   | 185.2  | 404.2  | 183.3  |
| 65°   | 47.6   | 154.4  | 107.0  |
| 70°   | 22.3   | 41.5   | 56.3   |
| 75°   | 12.2   | 17.2   | 35.1   |
| 80°   | 2.3    | 6.7    | 18.7   |
| 85°   | 0.0    | 0.2    | 6.6    |
| 90°   | 0.0    | 0.0    | 0.0    |

## UGR classification =

Corrected Glare Ratings for a Total Lamp Flux of 4150lm (S = 0.25H)

|                 | Room Reflection Factors (%)                                    |      |       |      |      |                |      |      |      |      |
|-----------------|----------------------------------------------------------------|------|-------|------|------|----------------|------|------|------|------|
| Ceiling         | 70                                                             | 70   | 50    | 50   | 30   | 70             | 70   | 50   | 50   | 30   |
| Walls           | 50                                                             | 30   | 50    | 30   | 30   | 50             | 30   | 50   | 30   | 30   |
| Floor           | 20                                                             | 20   | 20    | 20   | 20   | 20             | 20   | 20   | 20   | 20   |
| Room Dimensions | Viewed Crosswise                                               |      |       |      |      | Viewed Endwise |      |      |      |      |
| X = 2H Y = 2H   | 18.4                                                           | 20.0 | 18.7  | 20.3 | 20.5 | 18.8           | 20.5 | 19.2 | 20.7 | 21.0 |
| Y = 3H          | 18.2                                                           | 19.7 | 18.6  | 20.0 | 20.2 | 18.8           | 20.2 | 19.1 | 20.5 | 20.8 |
| Y = 4H          | 18.2                                                           | 19.5 | 18.5  | 19.8 | 20.1 | 18.7           | 20.1 | 19.1 | 20.4 | 20.7 |
| Y = 6H          | 18.1                                                           | 19.3 | 18.4  | 19.6 | 20.0 | 18.7           | 19.9 | 19.0 | 20.2 | 20.5 |
| Y = 8H          | 18.0                                                           | 19.2 | 18.4  | 19.6 | 19.9 | 18.6           | 19.8 | 19.0 | 20.2 | 20.5 |
| Y = 12H         | 18.0                                                           | 19.1 | 18.4  | 19.5 | 19.8 | 18.6           | 19.7 | 19.0 | 20.1 | 20.4 |
| X = 4H Y = 2H   | 18.5                                                           | 19.9 | 18.9  | 20.2 | 20.5 | 18.9           | 20.3 | 19.3 | 20.6 | 20.9 |
| Y = 3H          | 18.4                                                           | 19.5 | 18.8  | 19.9 | 20.2 | 18.9           | 20.0 | 19.3 | 20.4 | 20.7 |
| Y = 4H          | 18.4                                                           | 19.3 | 18.8  | 19.7 | 20.1 | 18.9           | 19.9 | 19.3 | 20.2 | 20.6 |
| Y = 6H          | 18.3                                                           | 19.2 | 18.7  | 19.5 | 19.9 | 18.9           | 19.7 | 19.3 | 20.1 | 20.5 |
| Y = 8H          | 18.3                                                           | 19.1 | 18.7  | 19.5 | 19.9 | 18.8           | 19.6 | 19.3 | 20.0 | 20.5 |
| Y = 12H         | 18.2                                                           | 18.9 | 18.7  | 19.4 | 19.8 | 18.8           | 19.5 | 19.3 | 19.9 | 20.4 |
| X = 8H Y = 4H   | 18.3                                                           | 19.1 | 18.7  | 19.5 | 19.9 | 18.8           | 19.6 | 19.2 | 20.0 | 20.4 |
| Y = 6H          | 18.2                                                           | 18.9 | 18.7  | 19.3 | 19.8 | 18.8           | 19.4 | 19.2 | 19.9 | 20.3 |
| Y = 8H          | 18.2                                                           | 18.8 | 18.7  | 19.2 | 19.7 | 18.8           | 19.3 | 19.2 | 19.8 | 20.3 |
| Y = 12H         | 18.2                                                           | 18.6 | 18.6  | 19.1 | 19.6 | 18.7           | 19.2 | 19.2 | 19.7 | 20.2 |
| X = 12H Y = 4H  | 18.2                                                           | 19.0 | 18.7  | 19.4 | 19.8 | 18.8           | 19.5 | 19.2 | 19.9 | 20.3 |
| Y = 6H          | 18.2                                                           | 18.8 | 18.7  | 19.2 | 19.7 | 18.7           | 19.3 | 19.2 | 19.8 | 20.3 |
| Y = 8H          | 18.2                                                           | 18.6 | 18.7  | 19.1 | 19.6 | 18.7           | 19.2 | 19.2 | 19.7 | 20.2 |
|                 | UGR Variations with Observer Position for Luminaire Spacings S |      |       |      |      |                |      |      |      |      |
| S = 1.0H        | +1.0                                                           |      | -2.3  |      |      | +0.7           |      | -1.4 |      |      |
| S = 1.5H        | +2.2                                                           |      | -7.4  |      |      | +2.1           |      | -6.4 |      |      |
| S = 2.0H        | +3.6                                                           |      | -14.2 |      |      | +3.3           |      | -8.1 |      |      |

## Colour properties

Correlated Colour Temperature : 4000



Ra: CRI (Ra) 80

Efficiency


| Utilisation Factors according to IES (%) |                             |     |     |     |     |    |    |    |    |    |
|------------------------------------------|-----------------------------|-----|-----|-----|-----|----|----|----|----|----|
|                                          | Room Reflection Factors (%) |     |     |     |     |    |    |    |    |    |
| Ceiling                                  | 80                          | 80  | 80  | 50  | 50  | 50 | 30 | 30 | 30 | 0  |
| Walls                                    | 50                          | 30  | 10  | 50  | 30  | 10 | 50 | 30 | 10 | 0  |
| Floor                                    | 20                          | 20  | 20  | 20  | 20  | 20 | 20 | 20 | 20 | 0  |
| RCR = 1                                  | 108                         | 106 | 104 | 102 | 100 | 99 | 98 | 97 | 96 | 90 |
| 2                                        | 97                          | 93  | 90  | 92  | 89  | 87 | 89 | 86 | 84 | 80 |
| 3                                        | 88                          | 83  | 79  | 83  | 79  | 76 | 81 | 77 | 75 | 71 |
| 4                                        | 80                          | 74  | 69  | 76  | 71  | 67 | 74 | 70 | 66 | 63 |
| 5                                        | 72                          | 66  | 61  | 69  | 64  | 60 | 67 | 63 | 59 | 56 |
| 6                                        | 66                          | 59  | 54  | 64  | 58  | 54 | 62 | 57 | 53 | 50 |
| 7                                        | 61                          | 54  | 49  | 59  | 53  | 48 | 57 | 52 | 48 | 46 |
| 8                                        | 56                          | 49  | 44  | 54  | 48  | 44 | 53 | 47 | 43 | 41 |
| 9                                        | 52                          | 45  | 40  | 50  | 44  | 40 | 49 | 44 | 40 | 38 |
| 10                                       | 48                          | 41  | 37  | 47  | 41  | 37 | 46 | 40 | 36 | 35 |

| Utilisation Factors according to LiTG (%) |                             |     |     |     |     |     |    |    |    |    |
|-------------------------------------------|-----------------------------|-----|-----|-----|-----|-----|----|----|----|----|
|                                           | Room Reflection Factors (%) |     |     |     |     |     |    |    |    |    |
| Ceiling                                   | 80                          | 80  | 80  | 50  | 50  | 50  | 50 | 50 | 30 | 0  |
| Walls                                     | 50                          | 30  | 50  | 30  | 50  | 30  | 50 | 30 | 30 | 0  |
| Floor                                     | 30                          | 30  | 10  | 10  | 30  | 30  | 10 | 10 | 10 | 0  |
| k = 0.60                                  | 59                          | 51  | 56  | 50  | 57  | 50  | 55 | 49 | 49 | 43 |
| 0.80                                      | 71                          | 63  | 67  | 60  | 68  | 61  | 65 | 60 | 59 | 54 |
| 1.00                                      | 80                          | 72  | 74  | 68  | 76  | 69  | 72 | 67 | 66 | 61 |
| 1.25                                      | 90                          | 82  | 82  | 77  | 85  | 79  | 80 | 76 | 75 | 70 |
| 1.50                                      | 95                          | 88  | 87  | 82  | 90  | 84  | 84 | 80 | 79 | 75 |
| 2.00                                      | 103                         | 96  | 92  | 88  | 96  | 91  | 89 | 86 | 85 | 80 |
| 2.50                                      | 108                         | 102 | 96  | 92  | 100 | 96  | 93 | 90 | 89 | 85 |
| 3.00                                      | 112                         | 108 | 98  | 96  | 104 | 101 | 96 | 94 | 92 | 88 |
| 4.00                                      | 116                         | 112 | 100 | 98  | 107 | 104 | 97 | 96 | 94 | 90 |
| 5.00                                      | 119                         | 115 | 102 | 100 | 109 | 106 | 99 | 98 | 96 | 93 |

## Dimensional drawing

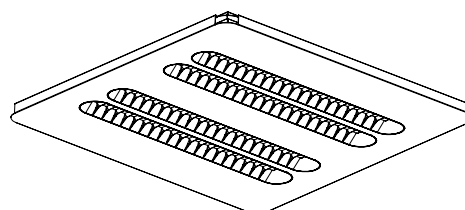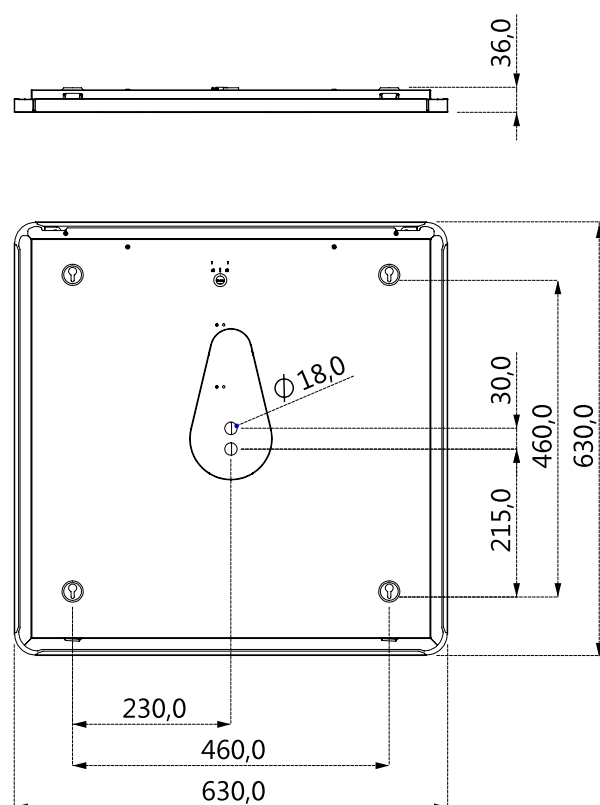

R3\*8/LED\*4\*

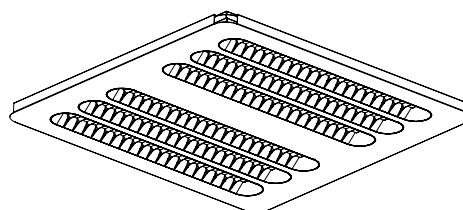

R3\*8/LED\*6\*