# K8M13



renovation module • linear

light source : LED • 5000 K

luminous flux: 243 lm

luminous efficacy : 276 lm/W

## **Product information**

#### **Mechanical properties**

type : individual luminaire


## **Electrical properties**

power: 0.9 W

voltage : 220-230V

frequency : 50-60Hz AC

photobiological safety : EN 62471: RISK GROUP 0 UNLIMITED

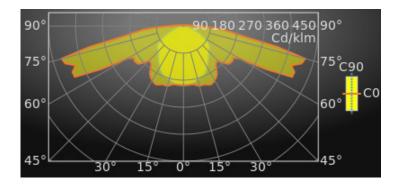

#### Luminance

luminous flux : 243 lm

luminous efficacy : 276 lm/W

ETAP

This document has been compiled by ETAP with the greatest possible care. However, the information contained in this publication is not binding and may change due to technical development. ETAP is not liable for any damage whatsoever resulting from the use of this document. www.etaplighting.com // Made in Belgium

#### **Colour properties**

Correlated Colour Temperature : 5000

Ra: CRI (Ra) 80

This document has been compiled by ETAP with the greatest possible care. However, the information contained in this publication is not binding and may change due to technical development. ETAP is not liable for any damage whatsoever resulting from the use of this document. www.etaplighting.com // Made in Belgium

