


D11R1/LEDN10DX33

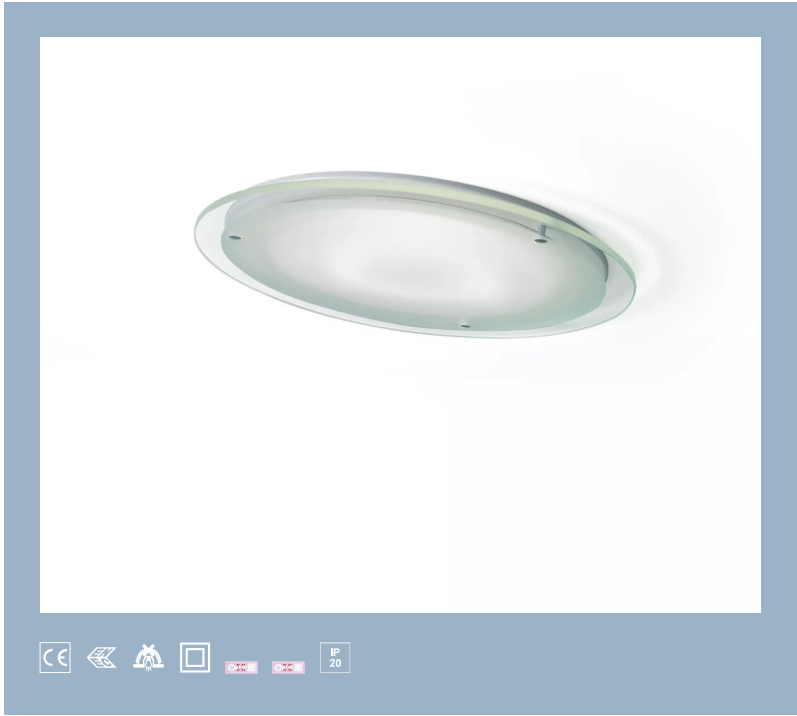

recessed luminaire • round

Application :	General office area's, Auditoria, General education area's
housing:	injection-moulded aluminium
light source :	LED • 4000 K
optics :	reflector • aluminium, satin anodised • wide-angle
UGR classification :	<=22
luminous flux:	1050 lm
luminous efficacy :	105 lm/W
LLMF:	99% @ 50khrs (Tq=25°C)

Product information

Mechanical properties

dimensions :	220 mm x 120 mm
cut-out size :	205 mm x 120 mm
colour:	RAL9003 - signal white
trim:	flat trim
type :	individual luminaire
IP:	IP20

Electrical properties

driver:	DALI dimmable
power :	10 W
voltage :	230-240V
frequency :	50Hz AC
photobiological safety :	EN 62471: RISK GROUP 1 UNLIMITED

Luminance


luminous flux : 1050 lm

luminous efficacy : 105 lm/W

UGR classification =: <=22

luminous area : 0.02 m²

Gamma	Average Luminances (Cd/m²) for 1050lm				
	C0	C30	C45	C60	C90
45°	13755	13755	13755	13755	13755
50°	12123	12123	12123	12123	12123
55°	10069	10069	10069	10069	10069
60°	7216	7216	7216	7216	7216
65°	6835	6835	6835	6835	6835
70°	6872	6872	6872	6872	6872
75°	6841	6841	6841	6841	6841
80°	6492	6492	6492	6492	6492
85°	6358	6358	6358	6358	6358

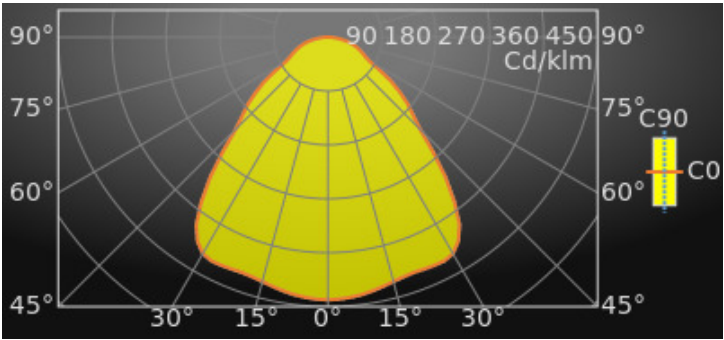

Classifications

CIE: 616 / 878 / 970 / 1000 / 1000

CIE FLUXCODE : 0.62 / 0.88 / 0.97 / 1.00 / 1.00

BZ: BZ3/1.25/BZ2/1.5/BZ3

CAE: Symmetrical

DIN: A50 (Nach Arbeitsblatt 7)

DIN_U: Phi u = 1.00

DIN_SU: Phi su = 0.63

UTE: 1.00 C + 0.00 T



This document has been compiled by ETAP with the greatest possible care. However, the information contained in this publication is not binding and may change due to technical development. ETAP is not liable for any damage whatsoever resulting from the use of this document.
www.etaplighting.com // Made in Belgium

Lifetime Data (Tq=25.0°C)

Time(khrs)	LLMF(%)	Cx(%)
10	100	2
20	100	4
30	100	6
40	99	8
50	99	10
60	99	12

Luminous intensities in cd

Intensity for 1050lm

Gamma	C0	C45	C90
0°	460.6	460.6	460.6
5°	457.9	457.9	457.9
10°	451.8	451.8	451.8
15°	443.5	443.5	443.5
20°	439.0	439.0	439.0
25°	441.4	441.4	441.4
30°	438.1	438.1	438.1
35°	401.7	401.7	401.7
40°	320.4	320.4	320.4
45°	228.6	228.6	228.6
50°	183.2	183.2	183.2
55°	135.8	135.8	135.8
60°	84.8	84.8	84.8
65°	67.9	67.9	67.9
70°	55.2	55.2	55.2
75°	41.6	41.6	41.6
80°	26.5	26.5	26.5
85°	13.0	13.0	13.0
90°	5.4	5.4	5.4

UGR classification =

Corrected Glare Ratings for a Total Lamp Flux of 1050lm (S = 0.25H)

	Room Reflection Factors (%)									
Ceiling	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor	20	20	20	20	20	20	20	20	20	20
Room Dimensions	Viewed Crosswise					Viewed Endwise				
X = 2H Y = 2H	19.7	21.4	20.0	21.6	21.9	19.7	21.4	20.0	21.6	21.9
Y = 3H	20.5	22.0	20.8	22.3	22.6	20.5	22.0	20.8	22.3	22.6
Y = 4H	20.9	22.4	21.3	22.7	23.0	20.9	22.4	21.3	22.7	23.0
Y = 6H	21.3	22.7	21.7	23.0	23.3	21.3	22.7	21.7	23.0	23.3
Y = 8H	21.5	22.7	21.8	23.1	23.4	21.5	22.7	21.8	23.1	23.4
Y = 12H	21.6	22.8	22.0	23.1	23.5	21.6	22.8	22.0	23.1	23.5
X = 4H Y = 2H	19.9	21.4	20.3	21.7	22.0	19.9	21.4	20.3	21.7	22.0
Y = 3H	21.0	22.3	21.4	22.6	22.9	21.0	22.3	21.4	22.6	22.9
Y = 4H	21.7	22.7	22.1	23.1	23.5	21.7	22.7	22.1	23.1	23.5
Y = 6H	22.2	23.2	22.6	23.5	24.0	22.2	23.2	22.6	23.5	24.0
Y = 8H	22.4	23.3	22.8	23.7	24.1	22.4	23.3	22.8	23.7	24.1
Y = 12H	22.5	23.4	23.0	23.8	24.2	22.5	23.4	23.0	23.8	24.2
X = 8H Y = 4H	21.9	22.8	22.3	23.2	23.6	21.9	22.8	22.3	23.2	23.6
Y = 6H	22.6	23.4	23.1	23.8	24.3	22.6	23.4	23.1	23.8	24.3
Y = 8H	22.9	23.6	23.4	24.0	24.5	22.9	23.6	23.4	24.0	24.5
Y = 12H	23.1	23.7	23.6	24.2	24.7	23.1	23.7	23.6	24.2	24.7
X = 12H Y = 4H	21.9	22.8	22.4	23.2	23.6	21.9	22.8	22.4	23.2	23.6
Y = 6H	22.7	23.3	23.1	23.8	24.3	22.7	23.3	23.1	23.8	24.3
Y = 8H	23.0	23.6	23.5	24.1	24.6	23.0	23.6	23.5	24.1	24.6
	UGR Variations with Observer Position for Luminaire Spacings S									
S = 1.0H	+0.2		-0.3			+0.2		-0.3		
S = 1.5H	+0.5		-0.9			+0.5		-0.9		
S = 2.0H	+1.2		-1.1			+1.2		-1.1		

Colour properties

Correlated Colour Temperature : 4000

Ra: CRI (Ra) 80

Efficiency

Utilisation Factors according to IES (%)										
	Room Reflection Factors (%)									
Ceiling	80	80	80	50	50	50	30	30	30	0
Walls	50	30	10	50	30	10	50	30	10	0
Floor	20	20	20	20	20	20	20	20	20	0
RCR = 1	105	103	101	99	97	95	95	93	92	87
2	93	89	85	88	84	82	85	82	80	75
3	83	77	73	79	74	71	76	72	69	65
4	75	68	63	71	66	62	69	64	61	57
5	68	61	55	65	59	54	63	57	54	51
6	62	54	49	59	53	48	57	52	48	45
7	57	49	44	54	48	43	53	47	43	40
8	52	44	39	50	43	39	49	43	39	36
9	48	41	36	46	40	35	45	39	35	33
10	44	37	32	43	37	32	42	36	32	30

Utilisation Factors according to LiTG (%)										
	Room Reflection Factors (%)									
Ceiling	80	80	80	50	50	50	50	50	30	0
Walls	50	30	50	30	50	30	50	30	30	0
Floor	30	30	10	10	30	30	10	10	10	0
k = 0.60	54	46	51	44	52	45	50	44	43	37
0.80	66	57	62	55	63	56	60	54	53	47
1.00	74	65	69	62	70	63	67	61	60	54
1.25	84	76	77	71	79	73	75	70	69	63
1.50	90	82	82	76	85	78	79	75	74	68
2.00	98	91	88	83	91	86	85	81	80	74
2.50	104	97	92	88	96	91	89	86	84	79
3.00	109	103	95	92	100	96	92	89	88	84
4.00	113	108	98	95	103	100	95	92	91	86
5.00	117	112	100	98	106	103	97	95	93	89

Dimensional drawing

205

