

K3M12S2



renovation module • linear

light source : LED • 5000 K

luminous flux: 530 lm

luminous efficacy : 541 lm/W

Product information

Mechanical properties

type : individual luminaire

Electrical properties

power : 1 W

voltage : 220-230V


frequency : 50-60Hz AC

photobiological safety : EN 62471: RISK GROUP 0
UNLIMITED

Luminance

luminous flux : 530 lm

luminous efficacy : 541 lm/W

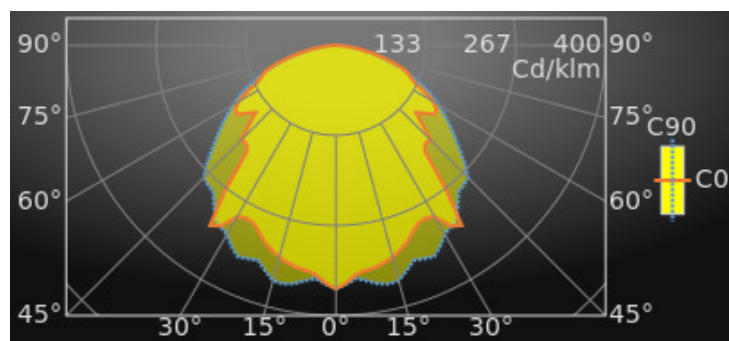

Colour properties

Correlated Colour Temperature : 5000

Ra: CRI (Ra) 80
