K3M13S2



renovation module • linear

light source : LED • 5000 K

luminous flux: 530 lm

luminous efficacy : 541 lm/W

Product information

Mechanical properties

type : individual luminaire


Electrical properties

power:1W

voltage : 220-230V

frequency : 50-60Hz AC

photobiological safety : EN 62471: RISK GROUP 0 UNLIMITED

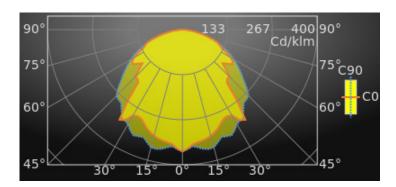

Luminance

luminous	flux :	: 530 lm

luminous efficacy : 541 lm/W



This document has been compiled by ETAP with the greatest possible care. However, the information contained in this publication is not binding and may change due to technical development. ETAP is not liable for any damage whatsoever resulting from the use of this document. www.etaplighting.com // Made in Belgium

Colour properties

Correlated Colour Temperature : 5000

Ra: CRI (Ra) 80

This document has been compiled by ETAP with the greatest possible care. However, the information contained in this publication is not binding and may change due to technical development. ETAP is not liable for any damage whatsoever resulting from the use of this document. www.etaplighting.com // Made in Belgium

