


V3RS10M/W6M0D0X2

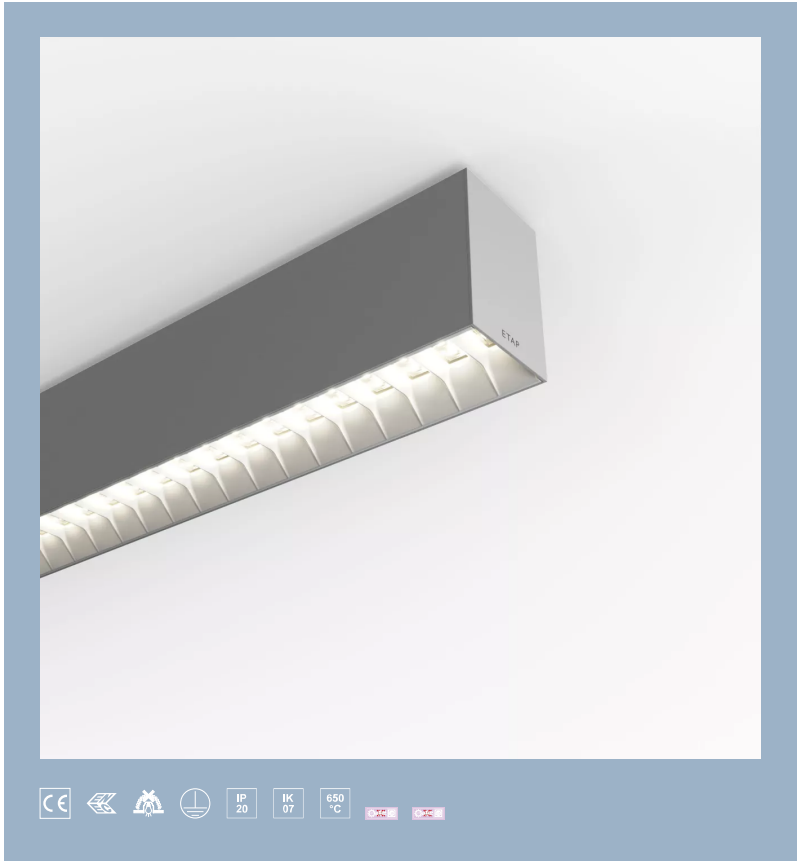

surface-mounted luminaire • linear

Application : Workspaces, Auditoria, General education area's, General healthcare area's

housing: lacquered aluminium

light source : LED • 3000 K

optics : Shielded lens • white polycarbonate (PC) • medium wide-angle

UGR classification : <=19

luminous flux: 5400 lm

luminous efficacy : 138 lm/W

LLMF: 96% @ 50khrs (Tq=25°C)

Product information

Mechanical properties

dimensions : 2739 mm x 60 mm x 90 mm

colour: RAL9006 - white aluminium (textured)

type : individual luminaire

IP: IP20

IK: IK07

Electrical properties

driver: DALI dimmable

power : 39.2 W

voltage : 220-240V

frequency : 50-60Hz AC

photobiological safety : EN 62471: RISK GROUP 1 UNLIMITED

Luminance

luminous flux : 5400 lm


luminous efficacy : 138 lm/W

luminance @ 65° = : 3000 cd/m²

UGR classification =: <=19

luminous area : 0.15 m²

Average Luminances (Cd/m²) for 5400lm					
Gamma	C0	C30	C45	C60	C90
45°	11044	12917	13685	12905	11262
50°	6358	10317	11255	10715	8834
55°	4703	6136	8676	8249	5201
60°	2032	4293	5246	4407	2624
65°	902	1588	2774	2234	2010
70°	627	763	1028	1446	1396
75°	488	541	655	878	1122
80°	329	407	460	568	942
85°	1	4	55	247	667

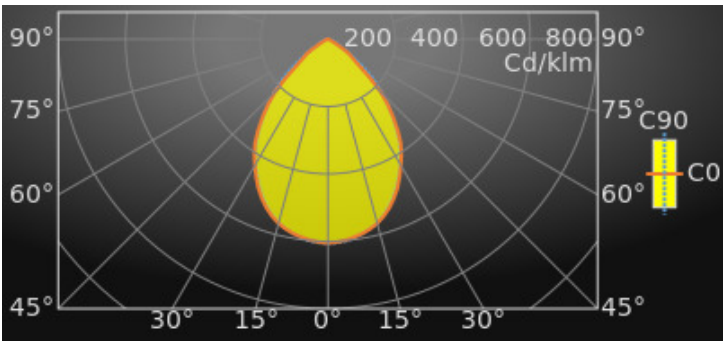

Classifications

CIE: 709 / 966 / 997 / 1000 / 1000

CIE FLUXCODE : 0.71 / 0.97 / 1.00 / 1.00 / 1.00

BZ: BZ2

CAE: Symmetrical

DIN: A60 (Nach Arbeitsblatt 7)

DIN_U: Phi u = 1.00

DIN_SU: Phi su = 0.71

UTE: 1.00 C + 0.00 T



This document has been compiled by ETAP with the greatest possible care. However, the information contained in this publication is not binding and may change due to technical development. ETAP is not liable for any damage whatsoever resulting from the use of this document.
www.etaplighting.com // Made in Belgium

Lifetime Data (Tq=25.0°C)

Time(khrs)	LLMF(%)	Cx(%)
10	99	2
20	99	4
30	98	6
40	97	8
50	97	10
60	96	12

Luminous intensities in cd

Intensity for 5400lm

Gamma	C0	C45	C90
0°	3268.2	3268.2	3268.2
5°	3233.9	3234.8	3246.0
10°	3166.4	3156.7	3160.3
15°	3056.0	3050.8	3043.9
20°	2877.6	2893.1	2845.5
25°	2635.7	2686.4	2589.5
30°	2336.3	2430.7	2307.4
35°	2031.6	2143.2	1975.8
40°	1623.8	1840.3	1588.7
45°	1196.5	1482.6	1220.2
50°	626.1	1108.4	870.1
55°	413.3	762.4	457.0
60°	155.7	401.9	201.0
65°	58.4	179.6	130.2
70°	32.8	53.9	73.2
75°	19.4	26.0	44.5
80°	8.8	12.2	25.1
85°	0.0	0.7	8.9
90°	0.0	0.0	0.0

UGR classification =

Corrected Glare Ratings for a Total Lamp Flux of 5400lm (S = 0.25H)

	Room Reflection Factors (%)									
Ceiling	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor	20	20	20	20	20	20	20	20	20	20
Room Dimensions	Viewed Crosswise					Viewed Endwise				
X = 2H Y = 2H	17.9	19.4	18.2	19.7	19.9	18.3	19.9	18.6	20.2	20.4
Y = 3H	17.7	19.1	18.0	19.4	19.7	18.3	19.7	18.6	20.0	20.3
Y = 4H	17.6	18.9	18.0	19.2	19.5	18.2	19.5	18.6	19.8	20.1
Y = 6H	17.6	18.8	17.9	19.1	19.4	18.2	19.4	18.5	19.7	20.0
Y = 8H	17.5	18.7	17.9	19.0	19.3	18.2	19.3	18.5	19.6	20.0
Y = 12H	17.5	18.6	17.9	18.9	19.3	18.1	19.2	18.5	19.6	19.9
X = 4H Y = 2H	17.9	19.3	18.3	19.6	19.9	18.4	19.7	18.7	20.0	20.3
Y = 3H	17.8	18.9	18.2	19.3	19.6	18.4	19.5	18.7	19.8	20.1
Y = 4H	17.8	18.7	18.2	19.1	19.5	18.3	19.3	18.7	19.7	20.0
Y = 6H	17.7	18.6	18.1	18.9	19.3	18.3	19.2	18.7	19.5	19.9
Y = 8H	17.7	18.5	18.1	18.9	19.3	18.3	19.1	18.7	19.5	19.9
Y = 12H	17.7	18.4	18.1	18.8	19.2	18.3	19.0	18.7	19.4	19.8
X = 8H Y = 4H	17.7	18.5	18.1	18.9	19.3	18.2	19.0	18.7	19.4	19.8
Y = 6H	17.6	18.3	18.1	18.7	19.2	18.2	18.9	18.7	19.3	19.8
Y = 8H	17.6	18.2	18.1	18.6	19.1	18.2	18.8	18.7	19.2	19.7
Y = 12H	17.6	18.1	18.1	18.5	19.1	18.2	18.7	18.7	19.2	19.7
X = 12H Y = 4H	17.7	18.4	18.1	18.8	19.2	18.2	18.9	18.7	19.3	19.8
Y = 6H	17.6	18.2	18.1	18.6	19.1	18.2	18.8	18.7	19.2	19.7
Y = 8H	17.6	18.1	18.1	18.5	19.1	18.2	18.7	18.7	19.2	19.7
	UGR Variations with Observer Position for Luminaire Spacings S									
S = 1.0H	+1.4		-2.7			+1.0		-2.1		
S = 1.5H	+2.7		-8.5			+2.0		-6.3		
S = 2.0H	+4.2		-12.3			+3.5		-7.5		

Colour properties

Correlated Colour Temperature : 3000

Ra: CRI (Ra) 80

Efficiency

Utilisation Factors according to IES (%)										
	Room Reflection Factors (%)									
Ceiling	80	80	80	50	50	50	30	30	30	0
Walls	50	30	10	50	30	10	50	30	10	0
Floor	20	20	20	20	20	20	20	20	20	0
RCR = 1	108	106	105	102	100	99	98	97	96	90
2	98	94	91	93	90	87	90	87	85	81
3	89	84	80	84	80	77	82	78	76	72
4	81	75	70	77	72	69	75	71	68	64
5	74	67	62	70	65	61	69	64	61	58
6	67	61	56	65	59	55	63	58	55	52
7	62	55	50	60	54	50	58	53	49	47
8	57	50	46	55	49	45	54	49	45	43
9	53	46	42	52	46	41	50	45	41	39
10	50	43	38	48	42	38	47	42	38	36

Utilisation Factors according to LiTG (%)										
	Room Reflection Factors (%)									
Ceiling	80	80	80	50	50	50	50	50	30	0
Walls	50	30	50	30	50	30	50	30	30	0
Floor	30	30	10	10	30	30	10	10	10	0
k = 0.60	61	53	58	51	59	52	56	51	50	45
0.80	73	65	68	62	70	63	66	61	61	55
1.00	81	73	75	69	77	71	73	68	68	62
1.25	91	83	83	78	86	80	81	77	76	71
1.50	96	89	87	83	91	86	85	81	80	76
2.00	103	97	92	89	97	92	90	87	86	81
2.50	109	103	96	93	101	97	93	91	90	86
3.00	113	108	99	96	105	101	96	94	93	89
4.00	116	112	101	99	107	104	98	96	95	91
5.00	119	116	103	101	109	107	99	98	96	93

Available accessories

V3H2500 *Ceiling mounting brackets*

V3H9900 *Installation file*

V3H9960 *Installation tool*



This document has been compiled by ETAP with the greatest possible care. However, the information contained in this publication is not binding and may change due to technical development. ETAP is not liable for any damage whatsoever resulting from the use of this document.
www.etaplighting.com // Made in Belgium

Dimensional drawing

