
# V3SDC0M/W40MD0X0

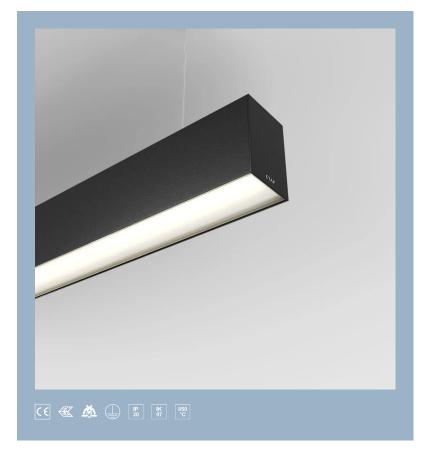

#### suspended luminaire • linear

Application: Education? Classrooms, Offices? Reception, Offices? Desk, Offices? Meeting room,

Offices ? Corridor

housing: lacquered aluminium

light source: LED • 3000 K

optics: diffuser • polycarbonate (PC) HaloOptics® •

wide-angle

luminous flux: 3450 lm

luminous efficacy: 130 lm/W

LLMF: 98% @ 50khrs (Tq=25°C)

## **Product information**

#### **Mechanical properties**

dimensions: 1123 mm x 60 mm x 90 mm

colour: RAL9005 - black

type: individual luminaire

IP: IP20

IK: IK07

#### **Electrical properties**

driver: DALI dimmable

power : 26.6 W

voltage: 220-240V

frequency: 50-60Hz AC

photobiological safety: EN 62471: RISK GROUP 1


**UNLIMITED** 



#### Luminance

luminous flux: 3450 lm

luminous efficacy: 130 lm/W

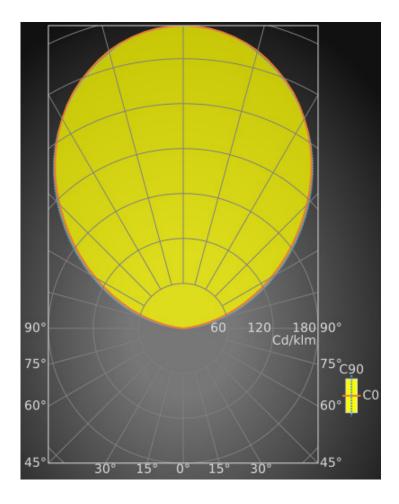



#### Luminous intensities in cd

Intensity for 3450lm

Gamma	C0	C45	C90	Gamma	C0	C45	C90
0°	0.0	0.0	0.0	90°	0.7	1.1	3.4
5°	0.0	0.0	0.0	95°	14.7	21.4	41.4
10°	0.0	0.0	0.0	100°	73.7	92.4	110.4
15°	0.0	0.0	0.0	105°	159.6	179.1	193.9
20°	0.0	0.0	0.0	110°	255.9	275.2	287.1
25°	0.0	0.0	0.0	115°	358.6	377.9	385.8
30°	0.0	0.0	0.0	120°	466.1	483.0	490.8
35°	0.0	0.0	0.0	125°	576.3	592.5	598.6
40°	0.0	0.0	0.0	130°	689.6	704.3	708.3
45°	0.0	0.0	0.0	135°	803.8	815.8	819.9
50°	0.0	0.0	0.0	140°	917.4	922.9	926.7
55°	0.0	0.0	0.0	145°	1020.8	1026.4	1026.7
60°	0.0	0.0	0.0	150°	1114.3	1116.9	1112.9
65°	0.0	0.0	0.0	155°	1198.3	1197.7	1189.6
70°	0.0	0.0	0.0	160°	1264.9	1265.6	1255.5
75°	0.0	0.0	0.0	165°	1322.4	1321.5	1310.4
80°	0.0	0.0	0.0	170°	1361.2	1358.8	1360.3
85°	0.0	0.0	0.0	175°	1385.9	1385.2	1384.6
90°	0.7	1.1	3.4	180°	1394.5	1394.5	1394.5

## **Colour properties**

Correlated Colour Temperature: 3000

Ra: CRI (Ra) 80

#### Available accessories


ACC-HI00-X00 Ceiling cap for suspended luminaires (R7/R3/Ley) - 5 poles terminal block - RAL9005 Jet black

V3-HI01-5P-1500 Suspension cables set for Ley individual - to combine with ceiling cap - 5 poles power cable - 2 steel cords (pre-mounted on luminaire) - 1 cable holder - max. 1,5m

V3-HI02-5P-1500 Suspension cables set for Ley individual - minimalist : no ceiling cap - 5 poles power cable - 2 steel cords (pre-mounted on luminaire) - 2 cable holders - max. 1,5m



# **Dimensional drawing**

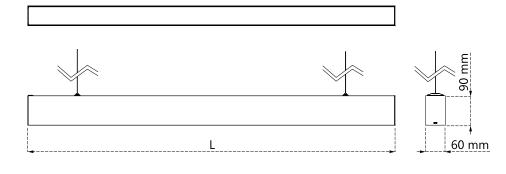

CODE	L
V3SD*0*/* <b>3</b> *	843 mm
V3SD*0*/* <b>4</b> *	1123 mm
V3SD*0*/* <b>5</b> *	1403 mm
V3SD*0*/* <b>6</b> *	1683 mm
V3SD*0*/* <b>7</b> *	1963 mm
V3SD*0*/* <b>8</b> *	2243 mm
V3SD*0*/* <b>9</b> *	2523 mm
V3SD*0*/* <b>0</b> *	2803 mm

