


K9R022/3N

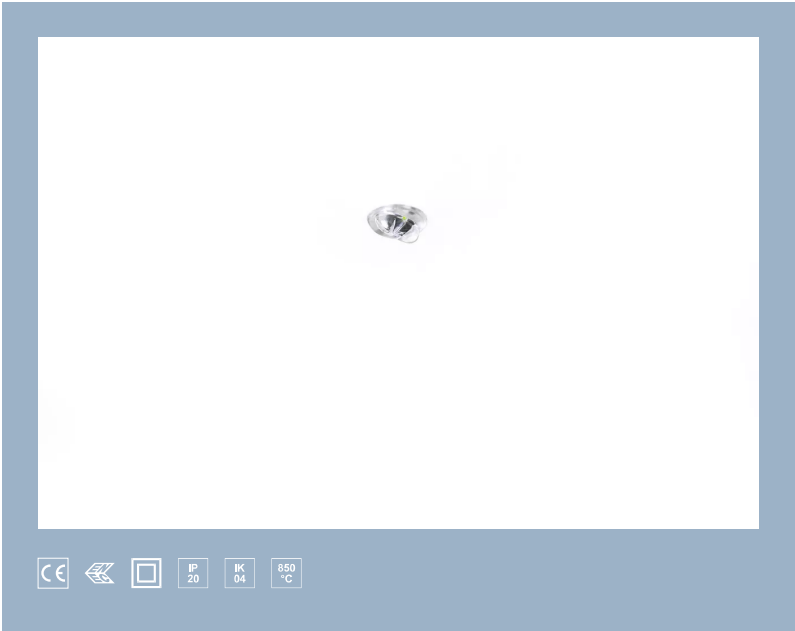

luminária de encastrar • redonda

aplicação :	Áreas de escritório gerais, Áreas de saúde gerais
base:	dissipador de calor em alumínio extrudido
fonte de luz :	LED • 5000 K
óptica :	lente • Acrílico (PMMA)
lumen operação de emergência :	220 lm
função:	presença
controle:	EST+ autoteste
segurança fotobiológica:	EN 62471: RISK GROUP 1 UNLIMITED

Product information

Medidas

dimensões :	30 mm x 32 mm
medida encastrável :	24 mm x 32 mm
cor:	RAL9003 - branco
IP:	IP20
IK:	IK04
temperatura ambiental:	5°C - 35°C •


Bateria

fonctionamiento :	não mantido
Bateria:	4 x NiMh 1,2V 1,1Ah
duração :	60 minutos

Equipamento eléctrico

potência :	0.9 W
tensão:	220-230V
frequência :	50-60Hz AC

fluxo luminoso : 220 lm

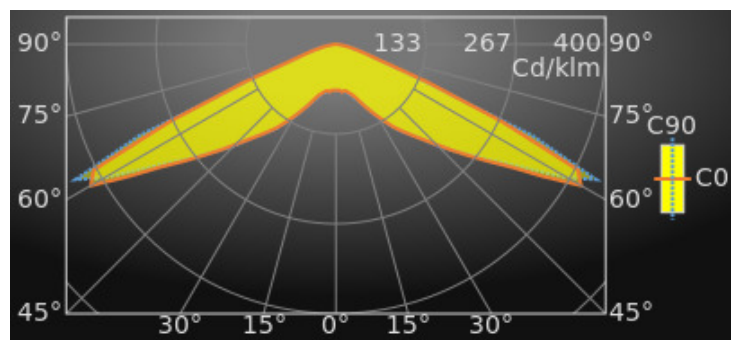

A 3D diagram illustrating the relationship between the height h and the dimensions a , b , c , and d . The diagram shows a rectangular prism with height h . The base is a rectangle with dimensions a and b . The top surface is a parallelogram with dimensions c and d . The height h is the vertical distance from the base to the top surface. The dimensions a and b are the horizontal distances from the vertical faces to the top surface. The dimensions c and d are the horizontal distances from the vertical faces to the top surface, measured along the top surface.

H (m)	a	b	c	d
2.6	5.1	12.4	5.2	12.4
2.8	---	13.2	5.4	13.2
3.0	5.6	13.9	5.7	13.9
3.5	6.1	15.7	6.2	15.7
4.0	6.6	17.3	6.6	17.3
4.5	3.7	17.5	3.7	17.5
5.0	1.2	14.8	1.2	14.8
6.0	---	15.0	---	15.0
7.0	---	15.4	---	15.4
8.0	---	16.2	---	16.2
10.0	12.3	4.6	11.1	4.6

AP Ceiling for 1.0 Lux and 220 lm

H (m)	a	b	c	d
2.6	4.5	11.5	4.5	11.5
2.8	4.7	12.1	4.7	12.1
3.0	3.3	12.8	3.3	12.8
3.5	0.9	10.5	0.9	10.5
4.0	0.5	10.6	0.6	10.6
4.5	0.2	10.5	0.1	10.5
5.0	0.1	10.9	---	10.9
6.0	---	11.7	---	11.7
7.0	8.9	3.3	8.1	3.3

Acessórios

K9RH85X1 *Placa de adaptação para K5 renovação (RAL9003)*

K9RH85X2 *Placa de adaptação para K5 renovação (RAL9006)*

K9RH5 *Conjunto de botão de teste*

Esboço

