

Cable distances – Kabelafstanden – Distance de câblage - Kabelabstand


Max 60 VA / circuit
Max 60 VA / stroomkring
Max 60 VA / Ausgangstromkreis

1,5mm ²	60 VA	53 m
	40 VA	80 m
	20 VA	160 m
2,5mm ²	60 VA	89 m
	40 VA	133 m
	20 VA	266 m

K1R21/3-24C6	1,9	VA	K9R11/6N-24-FC6	0,6	VA
K1R22/3-24C6	1,9	VA	K9R12/3-24C6	1,9	VA
K21/3-24C6	1,9	VA	K9R14/1-24-FC6	3,0	VA
K22/3-24C6	1,9	VA	K9R14/1-24C6	3,0	VA
K28/2-24C6	3,0	VA	K9R14/12-24C6	5,8	VA
K423/1-24C6	1,9	VA	K9R15/3-24-FC6	0,7	VA
K423/12-24C6	3,6	VA	K9R15/3-24C6	0,7	VA
K424/1-24C6	1,9	VA	K9R16/3-24C6	1,9	VA
K424/12-24C6	3,6	VA	K9R21/3-24C6	1,9	VA
K73/3-24C6	2,4	VA	K9R22/3-24C6	1,9	VA
K73/3-24C6-F	3,6	VA	K9R24/1-24-FC6	3,0	VA
K73/3-24L1C6	3,5	VA	K9R24/1-24C6	3,0	VA
K73/3-24L2C6	3,5	VA	K9R24/12-24C6	5,8	VA
K73/9-24C6	4,0	VA	K9R26/3-24C6	1,9	VA
K73/9-24L1C6	4,0	VA	K9R31/3-24C6	1,9	VA
K73/9-24L2C6	4,0	VA	K9R31/6N-24-FC6	0,6	VA
K74/3-24C6	2,4	VA	K9R32/3-24C6	1,9	VA
K74/3-24C6-F	3,6	VA	K9R35/3-24-FC6	0,7	VA
K74/3-24L1C6	3,5	VA	K9R35/3-24C6	0,7	VA
K74/3-24L2C6	3,5	VA	K9R36/3-24C6	1,9	VA
K74/9-24C6	4,0	VA	K9R43/1-24-FC6	3,0	VA
K74/9-24L1C6	4,0	VA	K9R43/1-24C6	3,0	VA
K74/9-24L2C6	4,0	VA	K9R43/12-24C6	5,8	VA
K9R01/3N-24C6	1,4	VA	K9R54/1-24-FC6	3,0	VA
K9R02/3N-24C6	1,4	VA	K9R54/1-24C6	3,0	VA
K9R11/3-24C6	1,9	VA	K9R54/12-24C6	5,8	VA

Adressering – Adresseren – Adresser - Adressieren

Set a unique address for every luminaire on a circuit!
Geef een uniek adres aan elk armatuur op een stroomkring!
Donnez une adresse unique à chaque luminaire dans un circuit!
Vergeben Sie eine eindeutige Adresse für jede Leuchte im Ausgangstromkreis!

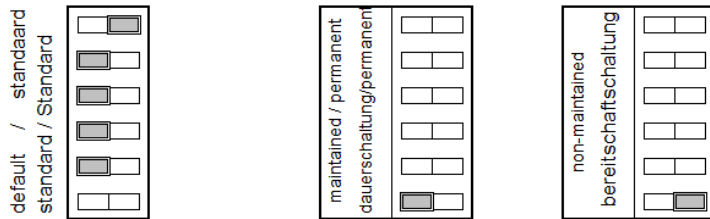

		address / adres / adresse / Adres															
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
1																	
2																	
3																	
4																	
5																	
6																	
7																	
8																	
9																	
10																	
11																	
12																	
13																	
14																	
15																	
16																	
17																	
18																	
19																	
20																	
21																	
22																	
23																	
24																	
25																	
26																	
27																	
28																	
29																	
30																	
31																	
32																	