

K9R14/1-23-AX5



surface-mounted luminaire • linear

- Application : General office area's, General healthcare area's
- housing: powder coated die-cast zamak
- light source : LED • 5000 K
- optics : sign plate with dot-matrix • acrylic (PMMA)
- Lumen output in emergency mode : 80 lm
- function: double sided signage
- monitoring: central supply (230V)
- photobiological safety: EN 62471: RISK GROUP 0 UNLIMITED

Product information

Mechanical properties

- dimensions : 324 mm x 26 mm x 63 mm
- colour: unpainted: rugged look
- IP: IP42
- IK: IK04
- ambient temperature: -20°C - 35°C •

Battery


- mode of operation : adjustable: non-maintained/maintained

Electrical properties

- power : 3.7 W
- voltage: 220-230V
- frequency : 50-60Hz AC/DC


Luminance

distance of perception : 24

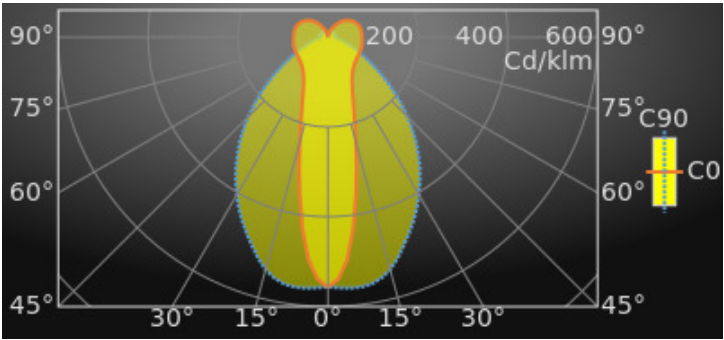

distance of perception : 24

Isolux diagram - wall mounting

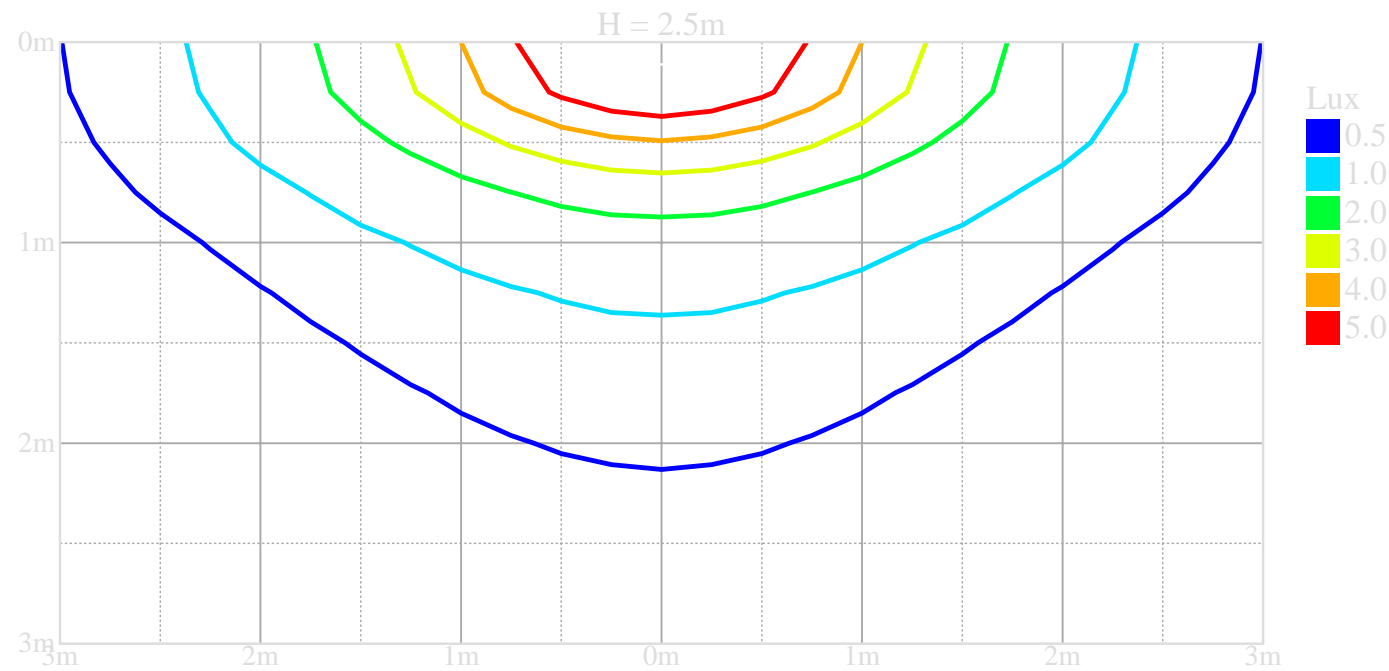

Available accessories

K9RH4-50X2 Suspension set (RAL9006-white aluminium)

Dimensional drawing

