

V3SDJ0M/W5LLD0X2



suspended luminaire • linear

Application : Workspaces, Auditoria, General education area's, General healthcare area's

housing: lacquered aluminium

light source : LED • 3000 K

optics : diffuser • opal acrylic (PMMA) • wide-angle

UGR classification : <=19

luminous flux: 4900 lm

luminous efficacy : 130 lm/W

LLMF: 97% @ 50khrs (Tq=25°C)

Product information

Mechanical properties

dimensions : 1403 mm x 60 mm x 90 mm

colour: RAL9006 - white aluminium (textured)

type : individual luminaire

IP: IP20

IK: IK07

Electrical properties

driver: DALI dimmable

power : 37.8 W

voltage : 220-240V

frequency : 50-60Hz AC

photobiological safety : EN 62471: RISK GROUP 1
UNLIMITED


Luminance

luminous flux : 4900 lm

luminous efficacy : 130 lm/W

UGR classification =: <=19

luminous area : 0.08 m²

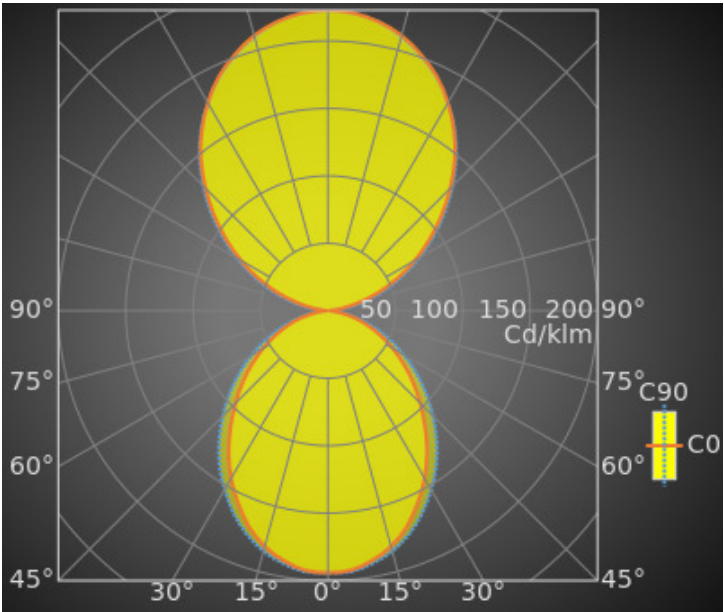

Average Luminances (Cd/m²) for 4900lm

Gamma	C0	C30	C45	C60	C90
45°	8270	8537	8800	9074	9390
50°	7744	8007	8255	8565	8914
55°	7211	7450	7725	8025	8388
60°	6676	6898	7178	7477	7849
65°	6120	6351	6611	6914	7266
70°	5514	5727	5961	6261	6616
75°	4817	4975	5180	5466	5843
80°	3916	4068	4225	4461	4834
85°	2663	2821	3006	3247	3645

Classifications

CIE: 239 / 374 / 436 / 450 / 1000

CIE FLUXCODE : 0.53 / 0.83 / 0.97 / 0.45 / 1.00

BZ: BZ4/1.25/BZ3/1.5/BZ4

CAE: Symmetrical

DIN: C42 (Nach Arbeitsblatt 7 und 8)

DIN_U: Phi u = 0.45

DIN_SU: Phi su = 0.59

UTE: 0.45 D + 0.55 T



Lifetime Data (Tq=25.0°C)

Time(khrs)	LLMF(%)	Cx(%)
10	99	2
20	99	4
30	98	6
40	98	8
50	97	9
60	97	11

Luminous intensities in cd

Intensity for 4900lm

Gamma	C0	C45	C90	Gamma	C0	C45	C90
0°	951.2	951.2	951.2	90°	1.0	1.6	4.2
5°	946.2	948.3	951.4	95°	9.8	14.6	29.7
10°	921.8	926.1	932.2	100°	55.1	69.5	83.6
15°	885.8	893.0	904.4	105°	122.7	137.9	149.6
20°	836.1	848.2	863.1	110°	198.7	213.8	223.2
25°	771.4	791.4	811.3	115°	279.6	294.7	300.9
30°	703.6	727.4	750.4	120°	364.1	377.4	383.5
35°	628.8	657.8	686.8	125°	450.7	463.4	468.2
40°	549.9	582.1	615.1	130°	539.6	551.0	554.2
45°	474.8	505.3	539.2	135°	629.1	638.5	641.7
50°	404.2	430.9	465.3	140°	718.0	722.4	725.3
55°	335.9	359.8	390.7	145°	799.0	803.4	803.6
60°	271.1	291.4	318.7	150°	872.2	874.2	871.1
65°	210.0	226.9	249.4	155°	937.9	937.5	931.2
70°	153.1	165.5	183.7	160°	990.1	990.7	982.7
75°	101.2	108.9	122.8	165°	1035.1	1034.4	1025.7
80°	55.2	59.6	68.2	170°	1065.4	1063.6	1064.8
85°	18.8	21.3	25.8	175°	1084.8	1084.2	1083.8
90°	1.0	1.6	4.2	180°	1091.5	1091.5	1091.5

UGR classification =

Corrected Glare Ratings for a Total Lamp Flux of 4900lm (S = 0.25H)

	Room Reflection Factors (%)									
Ceiling	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor	20	20	20	20	20	20	20	20	20	20
Room Dimensions	Viewed Crosswise					Viewed Endwise				
X = 2H Y = 2H	15.2	16.1	16.1	17.0	17.9	15.9	16.8	16.9	17.8	18.7
Y = 3H	16.3	17.1	17.2	18.0	19.0	17.2	18.0	18.1	18.9	19.8
Y = 4H	16.6	17.4	17.6	18.4	19.3	17.6	18.3	18.5	19.3	20.2
Y = 6H	16.8	17.5	17.8	18.5	19.4	17.8	18.5	18.8	19.5	20.4
Y = 8H	16.9	17.5	17.9	18.5	19.5	17.9	18.5	18.9	19.5	20.5
Y = 12H	16.8	17.5	17.8	18.5	19.4	17.9	18.5	18.9	19.5	20.4
X = 4H Y = 2H	15.6	16.4	16.6	17.4	18.3	16.2	17.0	17.2	18.0	18.9
Y = 3H	16.9	17.5	17.9	18.5	19.5	17.6	18.2	18.6	19.2	20.2
Y = 4H	17.3	17.9	18.3	18.9	19.9	18.1	18.7	19.2	19.7	20.7
Y = 6H	17.6	18.1	18.6	19.1	20.1	18.5	19.0	19.5	20.0	21.0
Y = 8H	17.7	18.1	18.7	19.1	20.1	18.6	19.0	19.6	20.0	21.0
Y = 12H	17.7	18.1	18.7	19.1	20.1	18.6	19.0	19.6	20.0	21.0
X = 8H Y = 4H	17.5	17.9	18.5	18.9	19.9	18.2	18.6	19.2	19.7	20.7
Y = 6H	17.8	18.2	18.9	19.3	20.3	18.6	19.0	19.7	20.0	21.1
Y = 8H	17.9	18.2	19.0	19.3	20.3	18.8	19.1	19.8	20.1	21.2
Y = 12H	18.0	18.2	19.0	19.3	20.4	18.8	19.1	19.9	20.2	21.2
X = 12H Y = 4H	17.4	17.8	18.5	18.9	19.9	18.1	18.5	19.2	19.6	20.6
Y = 6H	17.8	18.1	18.9	19.2	20.2	18.6	18.9	19.7	20.0	21.0
Y = 8H	17.9	18.2	19.0	19.3	20.3	18.7	19.0	19.8	20.1	21.1
	UGR Variations with Observer Position for Luminaire Spacings S									
S = 1.0H	+0.1		-0.2			+0.1		-0.2		
S = 1.5H	+0.3		-0.5			+0.2		-0.5		
S = 2.0H	+0.5		-0.9			+0.6		-0.8		

Colour properties

Correlated Colour Temperature : 3000

Ra: CRI (Ra) 80

Efficiency

Utilisation Factors according to IES (%)

	Room Reflection Factors (%)									
Ceiling	80	80	80	50	50	50	30	30	30	0
Walls	50	30	10	50	30	10	50	30	10	0
Floor	20	20	20	20	20	20	20	20	20	0
RCR = 1	94	92	90	71	70	69	58	57	56	38
2	83	79	76	63	60	58	51	49	48	33
3	74	68	64	56	52	50	45	43	41	28
4	65	59	55	50	46	43	41	38	35	24
5	58	52	47	45	40	37	37	33	31	21
6	52	45	41	40	36	32	33	30	27	19
7	47	40	35	37	32	28	30	27	24	17
8	43	36	31	33	29	25	28	24	21	15
9	39	32	28	31	26	22	26	22	19	13
10	36	29	25	28	23	20	24	20	17	12

Utilisation Factors according to LiTG (%)

	Room Reflection Factors (%)									
Ceiling	80	80	80	50	50	50	50	50	30	0
Walls	50	30	50	30	50	30	50	30	30	0
Floor	30	30	10	10	30	30	10	10	10	0
k = 0.60	42	34	40	33	33	28	32	27	23	15
0.80	52	44	49	42	41	35	39	34	29	19
1.00	60	51	56	49	47	41	44	39	34	23
1.25	68	60	63	56	53	47	50	45	38	26
1.50	74	66	67	61	57	52	53	49	42	29
2.00	82	75	74	68	62	58	58	55	46	32
2.50	88	81	78	73	67	63	62	59	49	35
3.00	93	86	81	77	70	66	64	61	52	37
4.00	98	92	84	81	73	70	67	65	54	38
5.00	101	97	87	84	75	73	69	67	56	39


Available accessories

ACC-HI00-X02 *Ceiling cap for suspended luminaires (R7/R3/Ley) - 5 poles terminal block - RAL9006 Aluminium white*

V3-HI01-5P-1500 *Suspension cables set for Ley individual - to combine with ceiling cap - 5 poles power cable - 2 steel cords - 1 cable holder - max. 1,5m*

V3-HI02-5P-1500 *Suspension cables set for Ley individual - minimalist : no ceiling cap - 5 poles power cable - 2 steel cords - 2 cable holders - max. 1,5m*

Dimensional drawing

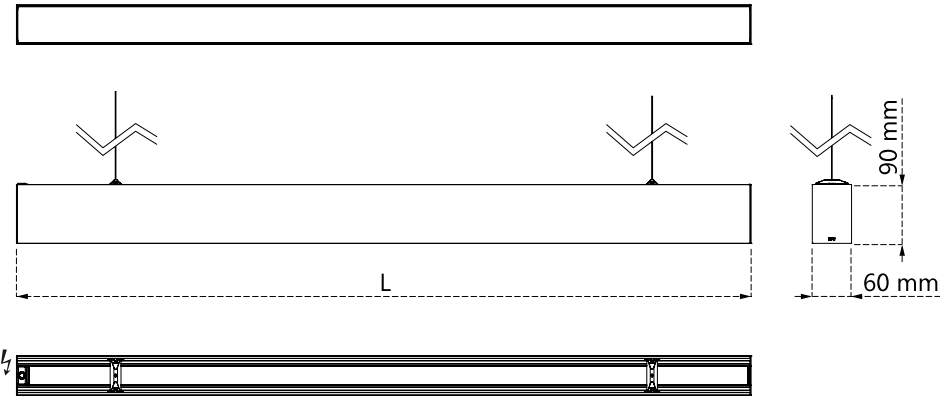

CODE	L
V3SD*0*/*3*	843 mm
V3SD*0*/*4*	1123 mm
V3SD*0*/*5*	1403 mm
V3SD*0*/*6*	1683 mm
V3SD*0*/*7*	1963 mm
V3SD*0*/*8*	2243 mm
V3SD*0*/*9*	2523 mm
V3SD*0*/*0*	2803 mm